

**FUSIBILI DIAZED RAPIDI****Caratteristiche generali:**

- Tipo prodotto: fusibili Diazed D;
- Caratteristica d'intervento: rapidi;
- Passo: E16 (NDZ), E27 (DII), E33 (DIII), R1 ¼" (DIV);
- Conformi alle norme: CEI 32-1, CEI 32-5, IEC 60269-1, IEC 60269-3;
- Corpo in steatite;
- Contatti in rame argentato;
- Corrente nominale: da 2A a 100A;
- Tensione nominale: 500V AC / 400V DC;
- Potere interruzione: 50kA AC / 8kA DC;
- Confezione minima: 10 pezzi;

FAST ACTING DIAZED FUSES**General characteristics:**

- *Product type: Diazed D fuses;*
- *Time-current characteristic: fast-acting;*
- *Thread: E16 (NDZ), E27 (DII), E33 (DIII), R1 ¼" (DIV);*
- *Conform to standards: CEI 32-1, CEI 32-5, IEC 60269-1, IEC 60269-3;*
- *Steatite body;*
- *Silver plated contacts;*
- *Rated current: from 2A to 100A;*
- *Rated voltage: 500V AC / 400V DC;*
- *Breaking capacity: 50kA AC / 8kA DC;*
- *Minimum packaging: 10 pieces;*


Foto del prodotto / Product image

Pagine totali del documento: 5

Document total pages: 5

Ultimo aggiornamento: 31 luglio 2018

Last update: 31st July 2018

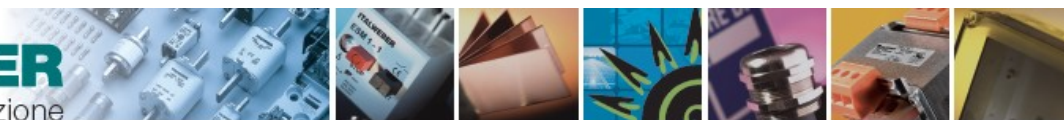

Codici per l'ordinazione:

Ordering codes:


Grandezza Size	Codice Code	Tipo Type	Passo Thread	In (A)	Vn (V)	Potenza dissipata Power dissipation (W)	Colore Colour	Conf. Pack.
NDZ	1211002	E2311101	E16	2	500	2,6	Rosa / Pink	10-500
	1211004	E2311102	E16	4	500	2,8	Marrone / Brown	10-500
	1211006	E2311103	E16	6	500	3,0	Verde / Green	10-500
	1211010	E2311104	E16	10	500	3,4	Rosso / Red	10-500
	1211016	E2311105	E16	16	500	3,7	Grigio / Grey	10-500
	1211020	E2311106	E16	20	500	4,4	Blu / Blue	10-500
	1211025	E2311107	E16	25	500	4,9	Giallo / Yellow	10-500
	1211030	-	E16	30	500	5,8	Nero / Black	10-500
	1211035	-	E16	35	500	7,0	Nero / Black	10-500
	1211040	-	E16	40	500	8,2	Nero / Black	10-500
1211050	-	E16	50	500	9,5	Bianco / White	10-500	
D II	1221002	E2312101	E27	2	500	2,6	Rosa / Pink	10-500
	1221004	E2312102	E27	4	500	2,8	Marrone / Brown	10-500
	1221006	E2312103	E27	6	500	3,0	Verde / Green	10-500
	1221010	E2312104	E27	10	500	3,4	Rosso / Red	10-500
	1221016	E2312105	E27	16	500	3,7	Grigio / Grey	10-500
	1221020	E2312106	E27	20	500	4,4	Blu / Blue	10-500
	1221025	E2312107	E27	25	500	4,9	Giallo / Yellow	10-500
D III	1231030	-	E33	30	500	4,9	Nero / Black	25-500
	1231035	E2313101	E33	35	500	8,3	Nero / Black	25-500
	1231040	-	E33	40	500	9,2	Nero / Black	25-500
	1231050	E2313102	E33	50	500	9,6	Bianco / White	25-500
	1231063	E2313103	E33	63	500	12,8	Rame / Copper	25-500
D IV	1241080	E2314101	R1 ¼"	80	500	12,7	Argento / Silver	3-48
	1241100	E2314102	R1 ¼"	100	500	15,4	Rosso / Red	3-48




Disegno (dimensioni in mm):

Drawing (dimensions in mm):


DI-E16




DII-E27

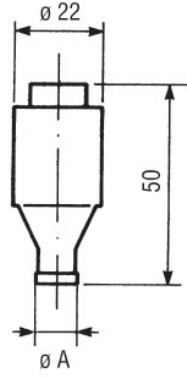


DIII-E33

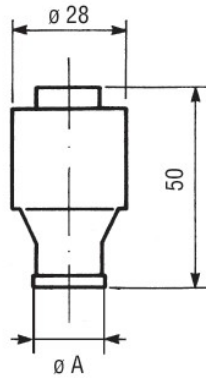

DIV-R1 1/4"

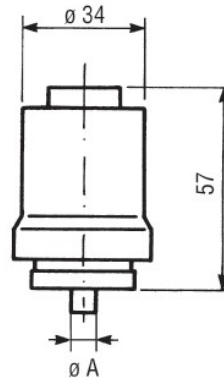

DV-R2"




passo - thread	I_n (A)	ϕA (mm)
E16, E27	2	6
	4	6
	6	6
	10	8
	16	10
	20	12
E33	25	14
	35	16
	50	18
R1 1/4"	63	20
	80	5
R2"	100	7
	125	5
	160	7
	200	9

passo - thread	I_n (A)	ϕA (mm)
E16, E27	2	6
	4	6
	6	6
	10	8
	16	10
	20	12
E33	25	14
	35	16
	50	18
R1 1/4"	63	20
	80	5
R2"	100	7
	125	5
	160	7
	200	9



Curve caratteristiche tempo / corrente:

Time / current characteristic curves:

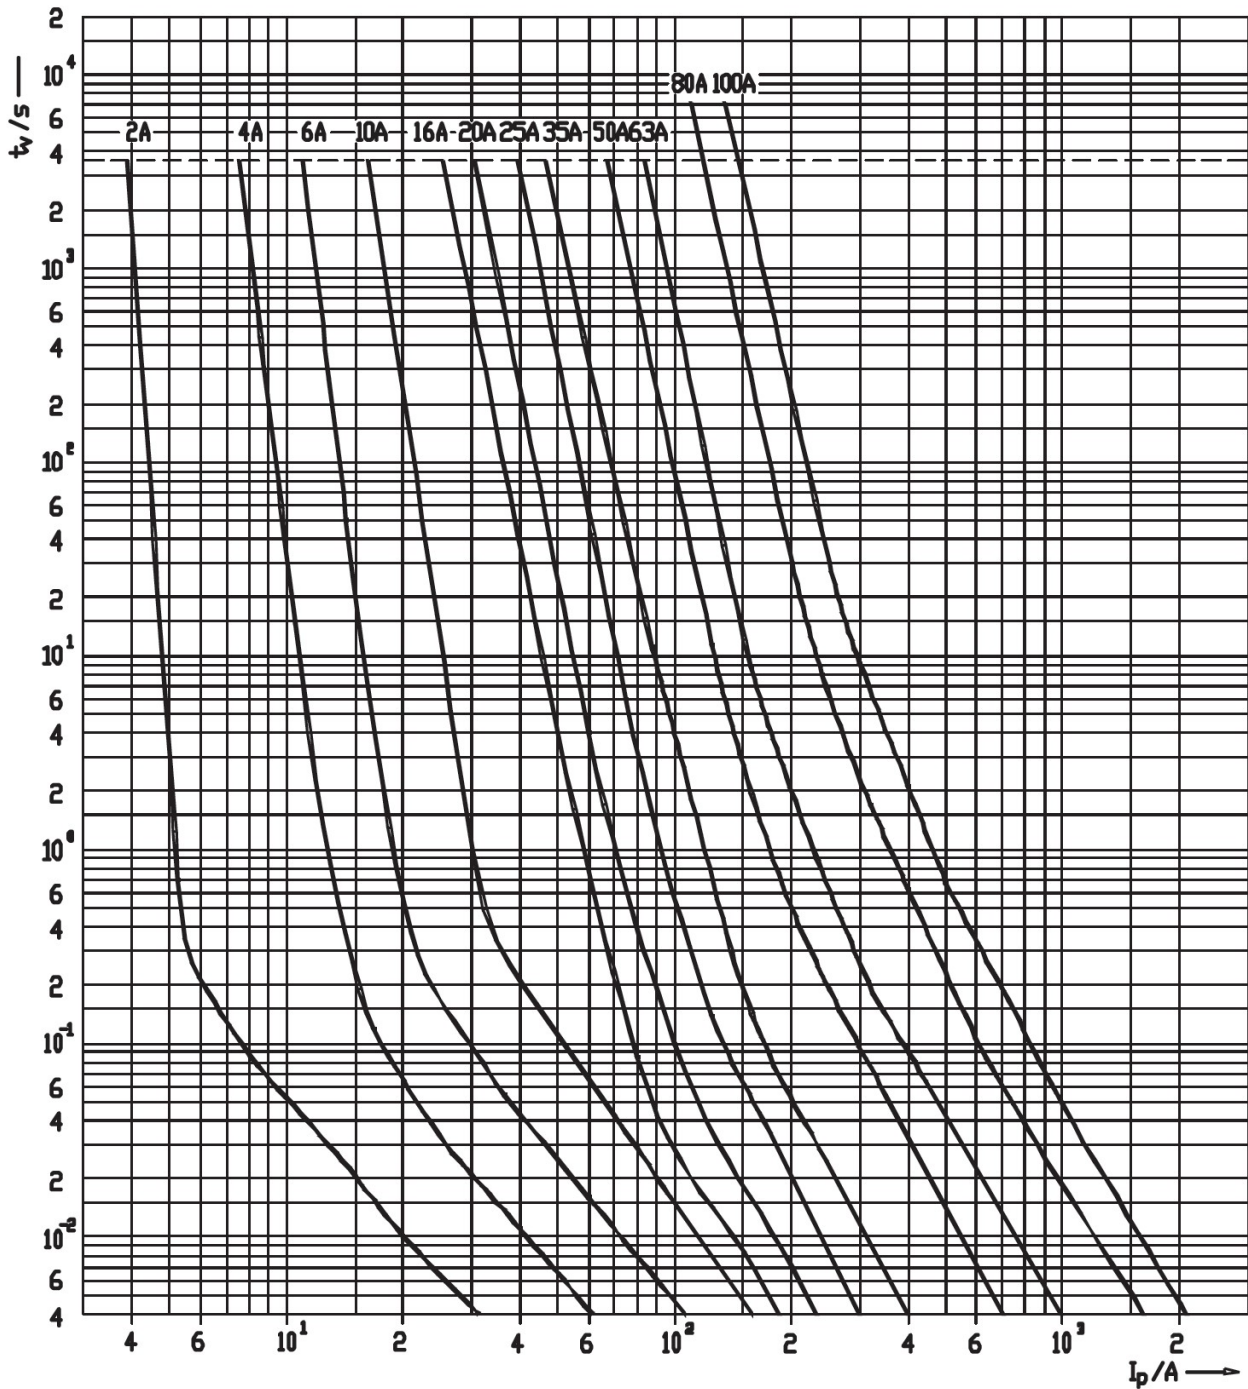



Curve caratteristiche di limitazione:

Cut-off characteristic curves:

