

PAR30LED RFL



Logistic Data

| | |
|-----------------------------|---------------|
| Code | 21482 |
| Product | PAR30LED RFL |
| Box quantity (pcs.) | 10/40 |
| EAN Box | 8012878214825 |
| Gross weight of box in kg | 9.78 |
| Weight of single lamp in kg | 0.163 |
| Length of box in m | 0.53 |
| Width of box in m | 0.44 |
| Height of box in m | 0.33 |
| ETIM class name | LED lamp |
| Beam angle | 15° |
| Brand of LED | OSRAM |
| Power Factor | >0.5 |
| Voltage | 220-240 |

Light Application Parameters

| | |
|---------------------------------|--------------|
| Luminous flux | 2400 lm |
| Luminous efficiency of lamp | 96lm/W |
| Colour temperature | 2700 K |
| Colour rendering index Ra | ≥80 |
| LLMF at the end of nominal life | 0.88(15000h) |
| SDCM | 2.1 |
| Imax(cd) | 17662 |
| Switching cycles | 20000 |


Electrical Parameters

| | |
|------------------------------|--------|
| Lamp nominal wattage | 25W |
| Rated wattage | 25.0 W |
| Nominal current (mA) | 170mA |
| Energy Consumption kWh/1000h | 25 |


Specification

| | |
|-----------------------|---------|
| dimnable | NO |
| Energylabel from 2013 | A+ |
| Suitable for indoors | Yes |
| Application | general |
| Base | E27 |
| Lamp shape | PAR30 |

Colour Temperature consistency (SDCM according to Mac Adam's ellipse)

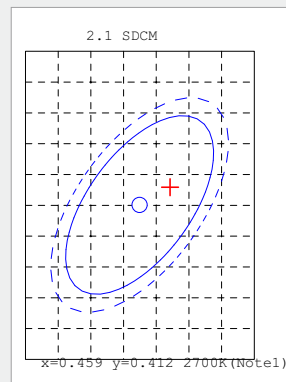

Peak of light intensity (max. cd)

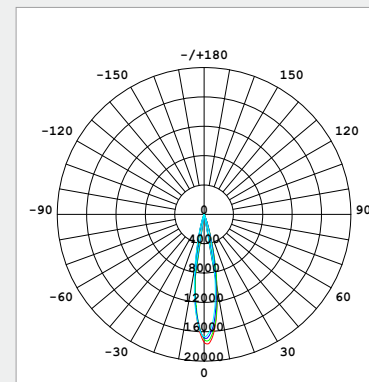

Spectral distribution of the lamp (range 180-800nm)

