



PRO MI6LED EVO

A+

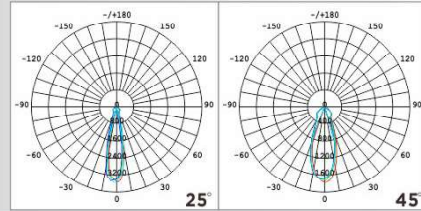


MI6LED EVO

codice	W	W	V	attacco	colore	lumen360°/cd	lumen90°	fascio	imballo
code	W	W	V	base	colour	lumen360°/cd	lumen90°	beam	packing
21418	16	137(ERP)	12AC/DC	G53	3000°K	1190/2055	1150	25°/45°	10/50




PRO MI6LED EVO

A+

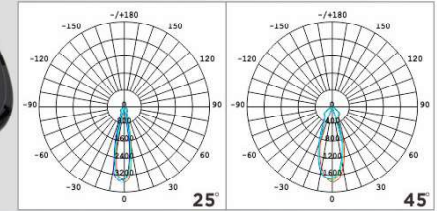


MI6LED EVO

codice	W	W	V	attacco	colore	lumen360°/cd	lumen90°	fascio	imballo
code	W	W	V	base	colour	lumen360°/cd	lumen90°	beam	packing
21420	16	137(ERP)	12AC/DC	G53	3000°K	1190/2055	1150	25°/45°	10/50

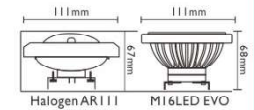


PRO MI6LED EVO

A+

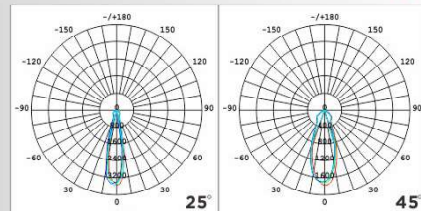

MI6LED EVO

codice	W	W	V	attacco	colore	lumen360°/cd	lumen90°	fascio	imballo
code	W	W	V	base	colour	lumen360°/cd	lumen90°	beam	packing
21419	16	137(ERP)	12AC/DC	G53	3000°K	1190/2055	1150	25°/45°	10/50



MI6LED EVO

Parte posteriore/Back of bulb

Smontaggio riflettore 45°
45° reflector removal

Installazione riflettore 25°
25° reflector installation

Aprire i ganci con cacciavite/
Open hooks by screwdriver

Fissare il riflettore tramite i ganci
Fix the reflector through the hooks