


STD M6LED

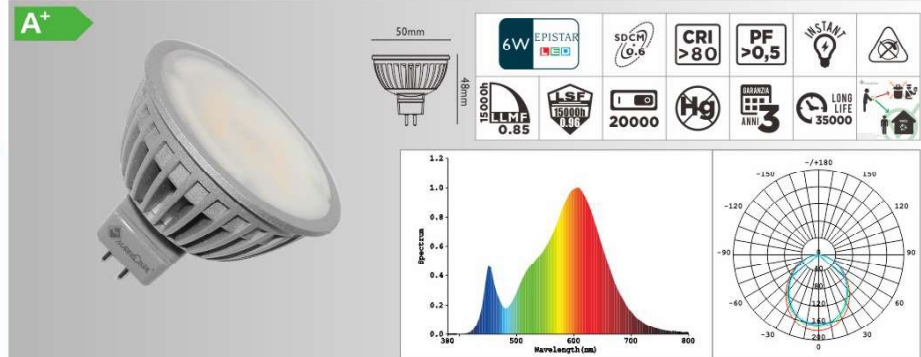


M6LED

codice	W	V	attacco	colore	lumen360°	lumen120°	fascio	imballo
code	W	V	base	colour	lumen360°	lumen120°	beam	packing
20987	6	12AC/DC	GU5,3	3000°K	440	420	120°	10/100
20988	6	12AC/DC	GU5,3	4200°K	450	430	120°	10/100

- Questa lampada può operare con tutti i trasformatori elettromeccanici e la maggior parte di quelli elettronici. I nostri trasformatori elettronici per lampade LED sono assolutamente compatibili. Vedi pag. 167
This lamp can work with all electro-magnetic transformers and with most electronic ones. Our electronic transformers for LED lamps are perfectly compatible. See page 167

- Vetro satinato
Frosted glass
- lampada non idonea per l'illuminazione d'accento
Bulb not suitable for spot lighting

STD M6LED

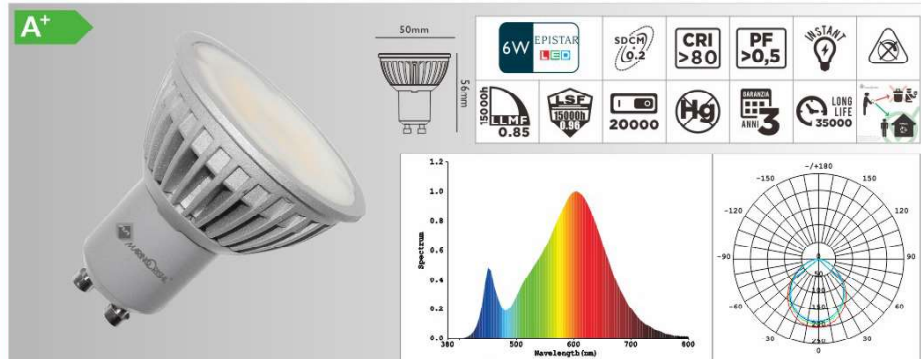


M6LED

codice	W	V	attacco	colore	lumen360°	lumen120°	fascio	imballo
code	W	V	base	colour	lumen360°	lumen120°	beam	packing
20886	6	220-240	GU10	3000°K	440	420	120°	10/100
20936	6	220-240	GU10	4200°K	450	430	120°	10/100
20887	6	220-240	GU10	6000°K	460	440	120°	10/100

- Vetro satinato
Frosted glass
- lampada non idonea per l'illuminazione d'accento
Bulb not suitable for spot lighting

STD M4LED

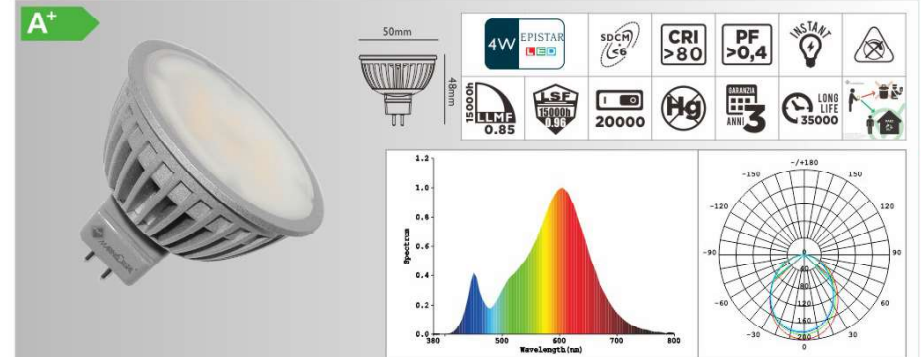


M4LED

codice	W	V	attacco	colore	lumen360°	lumen120°	fascio	imballo
code	W	V	base	colour	lumen360°	lumen120°	beam	packing
20869	4	12AC/DC	GU5,3	3000°K	300	290	120°	10/100

- Questa lampada può operare con tutti i trasformatori elettromeccanici e la maggior parte di quelli elettronici. I nostri trasformatori elettronici per lampade LED sono assolutamente compatibili. Vedi pag. 167
This lamp can work with all electro-magnetic transformers and with most electronic ones. Our electronic transformers for LED lamps are perfectly compatible. See page 167

- Vetro satinato
Frosted glass
- lampada non idonea per l'illuminazione d'accento
Bulb not suitable for spot lighting

STD M4LED

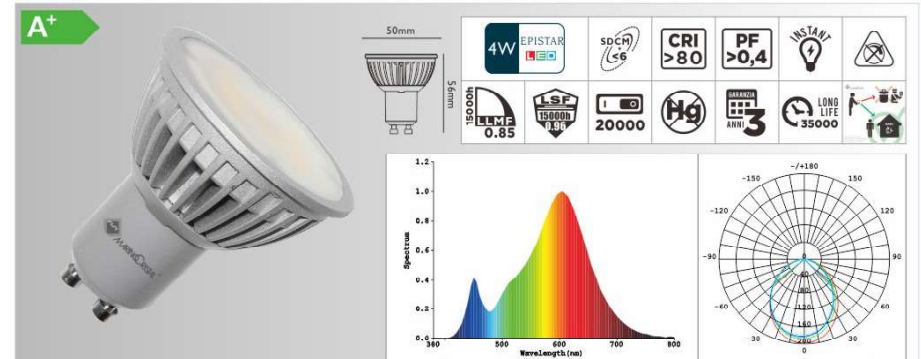

M4LED

codice	W	V	attacco	colore	lumen360°	lumen120°	fascio	imballo
code	W	V	base	colour	lumen360°	lumen120°	beam	packing
20871	4	220-240	GU10	3000°K	300	290	120°	10/100

- Vetro satinato
Frosted glass
- lampada non idonea per l'illuminazione d'accento
Bulb not suitable for spot lighting