




GLASSEX




+ **Brida**
Clamp
Collier



ANTIVANDÁLICA / ANTIVANDALISM / ANTIVANDALISME




APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

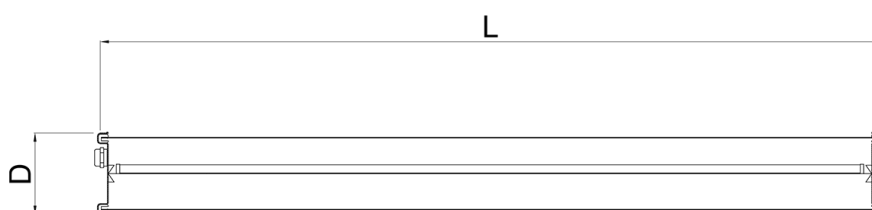


ATEX / EX / ATEX

airfal
INTERNATIONAL

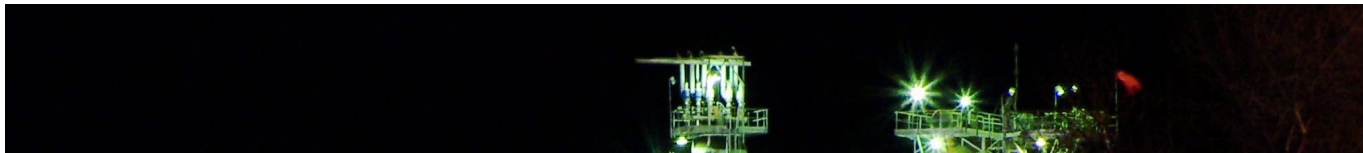

RG0	MACADAM 3/4	UGR <19	CR>80	L70B50 > 50.000	IK07	IP69K	2014/34/EU II 3GD Ex nR IIC T6 Gc Ex tc IIIC 85°C Dc
-----	----------------	------------	-------	-----------------------	------	-------	---

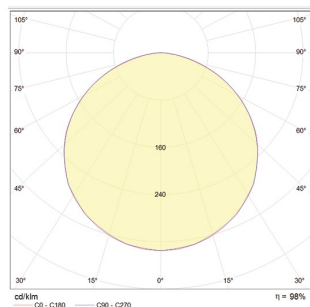

Ref.	Tamaño Size Dimension (mm)	Potencia Power Puissance (W)	Emisión bruta Gross output Flux de la source (Lm)	Emisión Neta Net output Flux sor- tant (Lm)	Tª color Tª colour Tª couleur (°K)	L (mm)	D (mm)	D + brida D + clamp D + fixations (mm)	Embalaje Packaging Emballage
GL113	600	13	1.490	1.480	3.000	740	105	133	1
GL114	600	13	1.550	1.540	4.000	740	105	133	1
GL123	600	16	2.560	2.544	3.000	740	105	133	1
GL124	600	16	2.670	2.653	4.000	740	105	133	1
GL213	1200	24	2.980	2.961	3.000	1.340	105	133	1
GL214	1200	24	3.200	3.180	4.000	1.340	105	133	1
GL223	1200	32	5.120	5.087	3.000	1.340	105	133	1
GL224	1200	32	5.340	5.306	4.000	1.340	105	133	1
GL313	1500	29	3.720	3.696	3.000	1.640	105	133	1
GL314	1500	29	4.000	3.974	4.000	1.640	105	133	1
GL323	1500	40	6.310	6.270	3.000	1.640	105	133	1
GL324	1500	40	6.700	6.657	4.000	1.640	105	133	1

ACCESORIOS GLASSEX / GLASSEX ACCESSORIES / ACCESSOIRES GLASSEX

Ref.	Q0349
Suspensión con cable de acero Steel cable suspension Suspension avec câble en acier	



LÍNEA CONTINUA CONTINUOUS LINE CONNECTION CÂBLAGE TGLVERSANT	3 polos / 3 poles / 3 pôles	Ref. Q0572
	5 polos / 5 poles / 5 pôles	Ref. Q0573

DALI	EMERGENCY 1h/3h
------	--------------------