


FARM LED



ANTIVANDÁLICA / ANTIVANDALISM / ANTIVANDALISME



LED



PMMA



RAB/BAR/RAB



SS 304




PG-11

APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES




Temperatura ambiente: -20 a +40°C.
Ambient working temperature: -20 a +40°C.
Température de travail : -20 a +40°C.

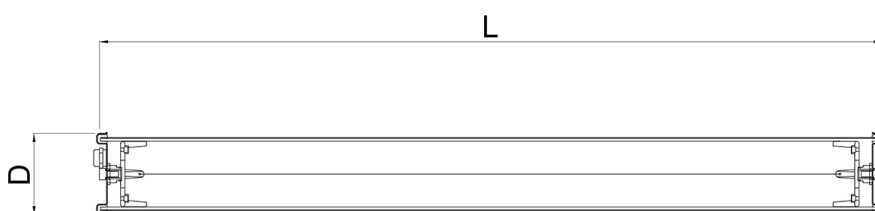




RG 1	MACADAM 3/4	UGR <19	CR>80	L80B50 > 70.000	IK10	IP69K	CE	EN 60598-1
------	----------------	------------	-------	-----------------------	------	-------	----	------------



Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión Neta Net output Flux sor- tant	Tª color Tª colour Tª couleur	L	D	D + brida D + clamp D + fixations	Embalaje Packaging Emballage
	(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
Q0795	600	13	1.490	1.155	3.000	763	100	120	1
Q0899	600	13	1.550	1.201	4.000	763	100	120	1
Q0900	600	18	2.427	1.801	3.000	763	100	120	1
Q0955	600	18	2.558	1.898	4.000	763	100	120	1
Q0796	1200	24	2.980	2.310	3.000	1.375	100	120	1
Q0957	1200	24	3.200	2.480	4.000	1.375	100	120	1
Q0958	1200	36	4.854	3.602	3.000	1.375	100	120	1
Q0959	1200	36	5.116	3.796	4.000	1.375	100	120	1
Q0797	1500	29	3.720	2.883	3.000	1.660	100	120	1
Q0961	1500	29	4.000	3.100	4.000	1.660	100	120	1
Q0962	1500	45	6.067	4.502	3.000	1.660	100	120	1
Q0963	1500	45	6.395	4.745	4.000	1.660	100	120	1


VERSIÓN ESPECIAL ALTAS TEMPERATURAS (Hasta 80°C Ta).
SPECIAL HIGH TEMPERATURES VERSION (Up to Ta 80°C).
VERSION SPÉCIALE POUR HAUTES TEMPÉRATURES (jusqu'à 80°C)

T_a máx = 80°C



Ref.	Tamaño Size Dimension	Potencia Power Puissance	Emisión bruta Gross output Flux de la source	Emisión Neta Net output Flux sor- tant	Tª color Tª colour Tª couleur	L	D	D + brida D + clamp D + fixations	Embalaje Packaging Emballage
	(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	
Q0955K	600	17	2.224	1.650	5.000	763	100	120	1
Q0959K	1200	34	4.448	3.300	5.000	1.375	100	120	1
Q0963K	1500	43	5.560	4.125	5.000	1.660	100	120	1



RG 0/1	MACADAM 3/4	UGR <19	 CR>80	L70B50 > 50.000	IK10	IP69K	CE EN 60598-1
--------	----------------	------------	--	-----------------------	------	-------	----------------------



ACCESORIOS FARM / FARM ACCESORIES / ACCESSOIRES FARM



Ref. **Q0349**
Suspensión con cable de acero
Steel cable suspension
Suspension avec câble en acier



Ref. **Q0401**
Bridas de acero inoxidable
Stainless steel clamps
Colliers inox antivandalisme



Ref. **Q0159**
Bridas de acero cincado
Zinc-plated steel clamps
Colliers en acier galvanisé



Ref. **Q0657**
Tapa acero INOX 316
Stainless Steel 316 end caps
Embouts INOX 316



Ref. **Q0106**
Bridas rápidas acero inox. 304
Stainless steel clamps
Colliers inox antivandalisme



Ref. **Q0982**
Conector rápido 3 polos
3 poles fast connector
connecteur rapide 3 pôles



Ref. **Q0889**
Conector rápido 5 polos
5 poles fast connector
connecteur rapide 5 pôles

LÍNEA CONTINUA CONTINUOUS LINE CONNECTION CÂBLAGE TRAVERSANT	3 polos / 3 poles / 3 pôles	Ref. Q0570
	5 polos / 5 poles / 5 pôles	Ref. Q0571

DALI	EMERGENCY 1h/3h
------	--------------------

Ref. **Q0978**
Sujeción a báculo
Pole adapter
Adaptateur de lampadaire

