


# 1.23

## PISTON




LED




ABS




PCO



AB/WS/AB




850°C





+40°C

-25°C



**APLICACIONES INDICADAS** / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

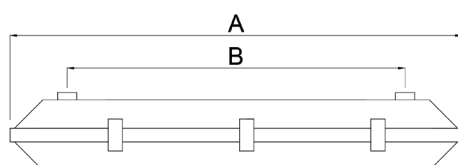


IT - DE



RG 1	MACADAM 3/4	UGR <19	CR>80	L70B50 > 50.000	IP65	IK08	CE EN 60598-1
------	----------------	------------	-------	-----------------------	------	------	------------------



































































**2 MÓDULOS LED / 2 LED MODULES / 2 MODULES LED**



Ref.	Tamaño Size Dimension (mm)	Potencia Watts Puissance (W)	Emisión Light emission Intensité lum. (Lm)	Emisión neta Net output Flux sortant (Lm)	Tª color Tª colour Tª couleur (°K)	A (mm)	B (mm)	C (mm)	D (mm)	Cierre Fasteners Fermetures 6	Embalaje Packaging Emballage 1
PI113	600	22	3140	2544	3000	664	260	160	110	6	1
PI114	600	22	3340	2705	4000	664	260	160	110	6	1
PI123	600	36	5377	4355	3000	664	260	160	110	6	1
PI124	600	36	5555	4500	4000	664	260	160	110	6	1
PI213	1200	44	6280	5087	3000	1274	870	160	110	8	1
PI214	1200	44	6544	5300	4000	1274	870	160	110	8	1
PI223	1200	72	10754	8711	3000	1274	870	160	110	8	1
PI224	1200	72	11110	9000	4000	1274	870	160	110	8	1
PI313	1500	56	7856	6364	3000	1575	650	160	110	12	1
PI314	1500	56	8520	6901	4000	1575	650	160	110	12	1
PI323	1500	90	13342	10807	3000	1575	650	160	110	12	1
PI324	1500	90	13888	11250	4000	1575	650	160	110	12	1

**ACCESORIOS PISTON / PISTON ACCESSORIES / ACCESSOIRES PISTON**

 <b>Ref. S2150</b> <b>Grapa de acero inoxidable</b> Stainless steel clip Clip acier inox	 <b>Ref. S2151</b> <b>Sujeción a carril</b> Rail fastening Platine de fixation sur rail	 <b>Ref. Q0943</b> <b>Conector 3 polos</b> 3 poles connector 3 pôles connecteur	 <b>Ref. Q0944</b> <b>Conector 3 polos</b> 3 poles connector 3 pôles connecteur
<b>LÍNEA CONTINUA</b> CONTINUOUS LINE CONNECTION CÂBLAGE TRAVERSANT		<b>3 polos / 3 poles / 3 pôles</b> <b>Ref. Q0883</b>	<div style="border: 1px solid black; padding: 5px; display: inline-block;">DALI</div> <b>EMERGENCY</b> 1h / 3h
		<b>5 polos / 5 poles / 5 pôles</b> <b>Ref. Q0887</b>	

	Cuerpo luminaria tubo policarbonato Polycarbonate luminaire body Corps du luminaire tube polycarbonate		Cuerpo extrusion Aluminum body Corps aluminium		Rango de temperaturas Temperatures range Tranche de temperatures
	Cuerpo luminaria metacrilato Methacrylate luminaire body Corps du luminaire méthacrylate		Cuerpo Acero Prelacado Pre-lacquered steel body Corps en acier prélaqué		Ensayo hilo Glow wire test Essais fil incandescent
	Cuerpo luminaria vidrio borosilicato Glass borosilicate luminaire body Corps du luminaire verre borosilicate		Cuerpo Aluminio Prelacado Pre-lacquered aluminum body Corps en aluminium prélaqué		Alto factor High Factor Hautes temperatures
	Cuerpo luminaria ABS ABS luminaire body Corps du luminaire ABS		Cuerpo ABS ABS body Corp ABS		Conector rápido Quick Connector Connecteur rapide
	Cuerpo luminaria poliestireno Polystyrene luminaire body Corps du luminaire polystyrène		Difusor Policarbonato Polycarbonate Diffuser Diffuseur Polycarbonate		Entrada cablesosca M25 (2e) M25 Cable entry (2e) Entrée de câbles a vis M25 (2e)
	Cuerpo aluminio Extrusion Aluminum Body Corps extrusion aluminium		Difusor Policarbonato Opal Opal Polycarbonate Diffuser Diffuseur Polycarbonate Opal		Regulación de flujo Dimmable equipment Ballast gradable
	Cuerpo hierro Iron body Corps fer		Difusor Poliestireno Polystyrene Diffuser Diffuseur Polystyrène		Módulo LED LED Module Modules LED
	Tapas Aluminio pintado Painted Aluminum end caps Embouts aluminium peint		Difusor PC/ACRIL PC/ACRIL Diffuser Diffuseur PC/ACRIL		Tubo LED LED Tube Tube LED
	Tapa acero INOX Stainless Steel 304 end caps Embouts INOX 304		Lamas ABS ABS louvers Lames ABS		Tubo fluorescencia Fluorescent Tube Tube Fluorescent
	Tapa acero INOX Stainless Steel 316 end caps		Lamas ABS - PC ABS - PC louvers Lames ABS - PC		Tubo LED o Tubo fluorescente LED Tube or fluorescent tube Tube LED ou Tube fluorescent
	Tapas ABS ABS Plastic end caps Embouts PLASTIQUE ABS		Abrazaderas acero cincado Galvanized Steel Clamps Fixations acier zingué		Fuente de luz Light source Source de lumière
	Tapas Policarbonato PC Plastic end caps Embouts PLASTIQUE PC		Brazaderas acero inox Stainless Steel Clamps Fixations INOX		Fuente de luz Light source Source de lumière
	Tapas Plástico Metalizado Metalized Plastic end caps Embouts PLASTIQUE CHROMÉ		Abrazaderas cierre rápido Quick opening stainless steel Fixations INOX ouverture à grenouillère		Fuente de luz Light source Source de lumière
	Tapas Zamak Niquelado Nickel-plated ZAMAK end caps Embouts ZAMAK NICKELÉ		Abrazaderas PC antivandálica Vandalism PC Clamps Fixations INOX ouverture à grenouillère		Zona ATEX EX Area ATEX Zone
	Tapas acero niquelado Nickel-plated steel end caps Embouts Acier Nickelé		Abrazaderas ABS ABS Clamps Fixations PMMA antivandalisme		Sistema de emergencia Emergency Sistem Système d'urgence
	Aluminio Anodizado Anodized aluminum Aluminium anodisé		Aro ABS ABS Ring Fixations ABS		Grupo de riesgo fotobiológico Photobiological risk group Group de risque photobiologique
	Reflector Aluminio brillo Reflector Aluminum Gloss Réflecteur Aluminium brillant		Abrazaderas techo o pared Ceiling or wall Clamps Fixations murs et parois		Índice MacAdam MacAdam Ellipse Taux MacAdam
	Reflector chapa lacada blanca White lacquered steel Reflector Réflecteur tôle lacquée blanc		Prensaestopa Cable Gland Presse étoupes		Índice de deslumbramiento unificado Unify glare rating Taux d'éblouissement
	Reflector acero lacado blanco White Lacquered Steel Reflector Réflecteur acier lacqué blanc		Empotrable para lámpara Embedded for lamps Encastrable pour lamp		Índice cromático Chromatic Index Taux chromatique
	Reflector acero galvanizado Galvanized Steel Reflector Réflecteur acier galvanisé		Brida suspensión perforación 18mm Clamps suspension borehole 18 mm Fixation avec suspension perforation 18 mm		Vida útil Useful life Durée de vie