

Formula65 LED



LED emergency lighting fixture and fixture with adhesive legend which complies with international safety standards using the latest LED technology. Thanks to high protection IP65 and durable polycarbonate construction fixture is suitable for use in demanding operating conditions. Highly efficient optical system and very easy installation rank these fixtures among the most cost-effective lighting products on the market. Inside the body made of a white polycarbonate are two series of highperformance LEDs (greater than 100 lm/W).

Technical data


Mounting: on ceiling or wall, with recessed box

Body: self-snuffing plastic (standard EN 60598-1, UL 94)

Diffuser: polycarbonate

Rated voltage: 230 V/50 Hz


Specification: available in SA (Maintained) and SE (Non maintained)

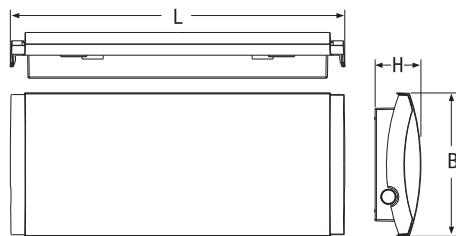

W**	• Dimensions (mm) •			Source
	L	B	H	
6-8-11-24	354	152	48.5	LED

** Indicative power for comparison with fluorescent tube lighting

Visible distance	
Adhesive legend	26 m
Exit sign	28 m



ACCESSORIES: PROVIDED WITH		
Code	Description	Pcs
19040	recessed box with frame	1
19044*	adhesive legends left / right / down	1

* Adhesive legends are provided for SA (Maintained) version only.

ACCESSORIES: TO BE ORDERED SEPARATELY		
Code	Description	Pcs
19041	false ceiling bracket	1
19042	exit sign LEFT, RIGHT Bandiera	1
19043	exit sign DOWN Bandiera	1
19044	adhesive legends LEFT / RIGHT / DOWN	1
19045	bracket for flag installation on wall	1

WALL MOUNTING WITH BUBBLE LEVEL




19040 recessed box with frame, supplied with the fixture

CEILING MOUNTING



RECESSED MOUNTING



19040 recessed box with frame, supplied with the fixture

DOUBLE-SIDED FLAG MOUNTING ON WALL



19045 bracket for flag installation on wall
19042 exit sign LEFT, RIGHT Bandiera
19043 exit sign DOWN Bandiera

to be ordered separately
to be ordered separately
to be ordered separately