



# Stile In

STILE IN LED 11 SE8P

Flush-mounted emergency luminaire, suitable for areas subject to prolonged blackouts and with a wide choice of accessories for installation flexibility

## Control system TR

Order code 1499

EAN 8002219597809

## Technical specifications



Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Absorbed SE (max)	2 W
Control system	TR
Autonomy	8h
Battery included	Yes
Battery type	Lead
Battery	Pb 4V 3Ah
Charging time	24 h
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
LED number	20
Photobiological risk	RG0
CRI color rendering	>80
Operation mode	NM
Equivalent power	11W
Flux SE	130 lm
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.05
Glow wire strength	850 °C - 30s.
Number of Batteries	1
Visibility distance	15 m
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

## Installation and applications

Environment	Offices
Application	-, Offices, Industrial Areas, Public Areas

## Mechanical specifications

Height	55 mm
Length	102 mm
Width	292 mm
Weight	0.7 Kg
Body material	Polycarbonate
Colour housing	White RAL 9003

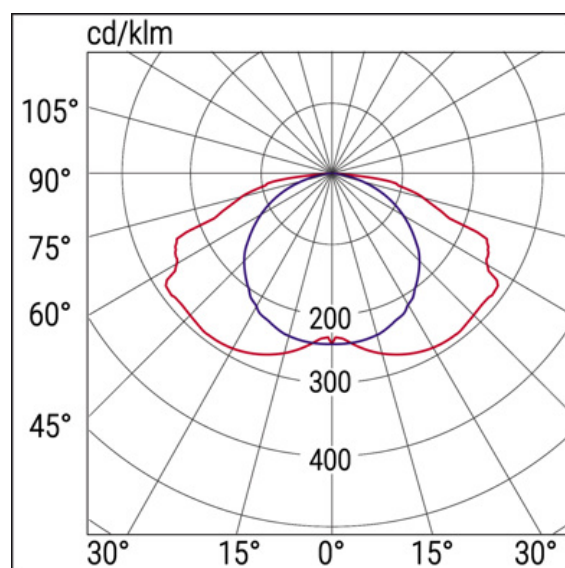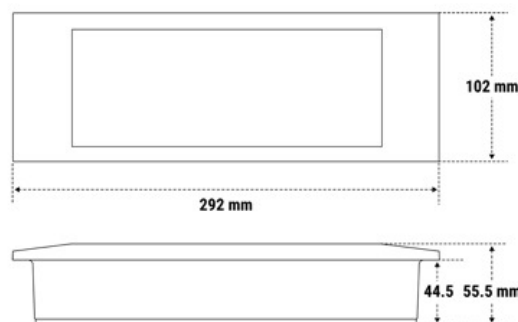

Cover material	<b>Transparent polycarbonate</b>
Diffuser finiture	<b>Clear</b>
Protection grade IP	<b>IP40</b>
Protection grade IK	<b>IK05</b>

## Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020

## Supplied accessories



**3733**  
INCASSO STILE 6W/11W  
3106/IP


## Accessories



**4267**  
SCHERMO BAND DXSX  
DES/COMP LED



**4265**  
STAFFA PARETE X BAND  
DES/COMP



**4264**  
STAFFA C.SOFFITTO STILE IN  
ALTA



**4268**  
SCHERMO BAND BASS  
DES/COMP LED



**3912**  
GRIGLIA EM 440X215X99



**4278**  
ADES 3 SX DX BS DESIGNLED  
TECH

## Spare parts



**415438001**  
PB 4V 3AH CABLE 5023