



Pratica Modula

P.MODULA 500 IP42 SA/SE RM

Innovative emergency luminaire with integrated Modula junction bracket that allows programming and wiring without dismantling the luminaire.



Control system TR

Order code 18621

EAN 8002219886606

Technical specifications

| | |
|----------------------------|--|
| Supply voltage type | AC |
| Nominal voltage (AC) | 230 Vac |
| Absorbed SE (max) | 5.8 W |
| Control system | TR |
| Autonomy | 1h, 1.5h, 2h, 3h |
| Battery included | Yes |
| Battery type | LiFe |
| Battery | LiFe 3.2V 1.5Ah |
| Charging time | 12 h |
| Ambient temperature (min) | 0 °C |
| Ambient temperature (max) | 40 °C |
| Insulation class | II |
| CCT light tone | 4000 K |
| LED number | 36 |
| Photobiological risk | RG0 |
| Booster battery | RA11f |
| Colour reflector | White RAL 9003 |
| Colour trim | White RAL 9003 |
| Operation mode | NM/M |
| Equivalent power | 36W |
| Flux SE booster | 750 lm, 500 lm, 425 lm, 275 lm |
| Flux SA | 250 lm |
| Flux SE | 500 lm, 350 lm, 275 lm, 175 lm |
| Frequency (max) | 60 Hz |
| Frequency (min) | 50 Hz |
| Power factor | 0.45 |
| Glow wire strength | 850 °C - 30s. |
| Mounting | Wall, Ceiling, Recessed, False Ceiling Recessed, Suspension, Track & Rail, Surface/Suspended, Electrified rail, Flush mounting box 3M |
| Number of Batteries | 1 |
| Pictogram included | Yes |
| Rest mode | Yes |
| Visibility distance | 21 m |
| Voltage supply range (max) | 253 V |
| Voltage supply range (min) | 207 V |

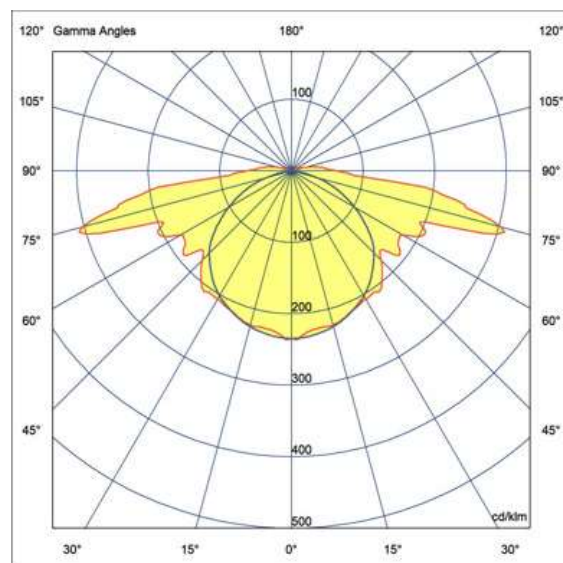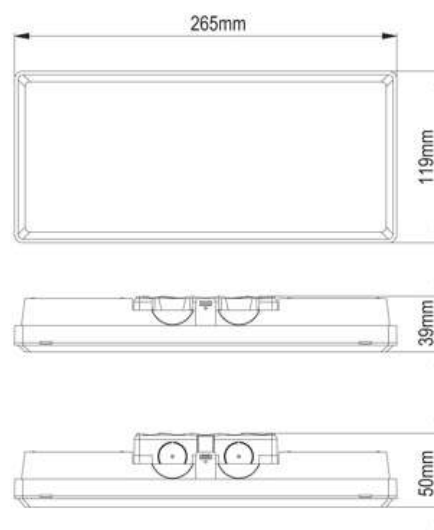

Installation and applications

| | |
|-------------|--|
| Environment | Secondary Areas |
| Application | Offices, Building Entrances, Escape Routes, Condos, Residential Areas, Congress Centers, Hotels, Stores, Schools, Malls |

Mechanical specifications

| | |
|---------------------|----------------------------------|
| Height | 38 mm |
| Length | 265 mm |
| Width | 119 mm |
| Weight | 0.55 Kg |
| Cutout length | 300 mm |
| Cutout wide | 120 mm |
| Body material | Polycarbonate |
| Colour housing | White RAL 9003 |
| Cover material | Transparent polycarbonate |
| Lens material | Methacrylate |
| Reflector material | Polycarbonate |
| Protection grade IP | IP42 |
| Protection grade IK | IK07 |

Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020

Supplied accessories



18589
STAFFA DERIVAZIONE EASY
BOX



18584
ADES SX/DX/BS/UP P.MODULA



18598
CORNICE ESTETICA

Accessories



4129
SCHERMO BAND PRATICA UP



18590
STAFFA 45° P.MODULA



4127
SCHERMO BAND PRATICA
SX/DX



4319
KIT BINARIO TRIFASE UP LED



18582
SCHERMO BAND BASSO
P.MODULA



4128
SCHERMO BAND PRATICA BS



18583
SCHERMO BAND ALTO
P.MODULA



18592
KIT IP65 TUBO BOX BASSO
P.MOD



15078
ICE PACK MODULA



18597
TEGOLINO PRO PIOGGIA INOX



RA11
BOOSTER AR M LiFe 3.2V 1,5Ah



18599
ADATT INCASSO PRATICA IP65



18586
STAFFA CONTROS+CORNICE



18580
SCAT INCASSO+CORNICE
P.MODULA



18581
SCHERMO BAND SX/DX
P.MODULA



3723
GANCIO SOSPENSIONE
4004/PR



18596
SCHERMO ALTO P.MODULA




18587
STAFFA BLINDOLUCE
P.MODULA



18593
SCHERMO SX P.MODULA



18594
SCHERMO DX P.MODULA



18591
GRIGLIA EM 305X135X80



18585
STAFFA PARETE BAND
P.MODULA



18595
SCHERMO BASSO P.MODULA

Spare parts



415436001
LI-FEPO4 3.2V 1.5AH 18650