



Pratica Modula

P.MODULA 150 IP65 SA/SE RM

Innovative emergency luminaire with integrated Modula junction bracket that allows programming and wiring without dismantling the luminaire.



Control system TR

Order code 18631

EAN 8002219886644

Technical specifications

Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Absorbed SE (max)	5.8 W
Control system	TR
Autonomy	1h, 1.5h, 2h, 3h
Battery included	Yes
Battery type	LiFe
Battery	LiFe 3.2V 0.5Ah
Charging time	12 h
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
LED number	36
Photobiological risk	RG0
Booster battery	RA10f
Colour reflector	White RAL 9003
Colour trim	White RAL 9003
Operation mode	NM/M
Equivalent power	24W
Flux SE booster	225 lm, 150 lm, 125 lm, 85 lm
Flux SA	250 lm
Flux SE	150 lm, 100 lm, 85 lm, 55 lm
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.45
Glow wire strength	850 °C - 30s.
Mounting	Wall, Ceiling, Recessed, False Ceiling Recessed, Suspension, Track & Rail, Surface/Suspended, Electrified rail, Flush mounting box 3M
Number of Batteries	1
Pictogram included	Yes
Rest mode	Yes
Visibility distance	21 m
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

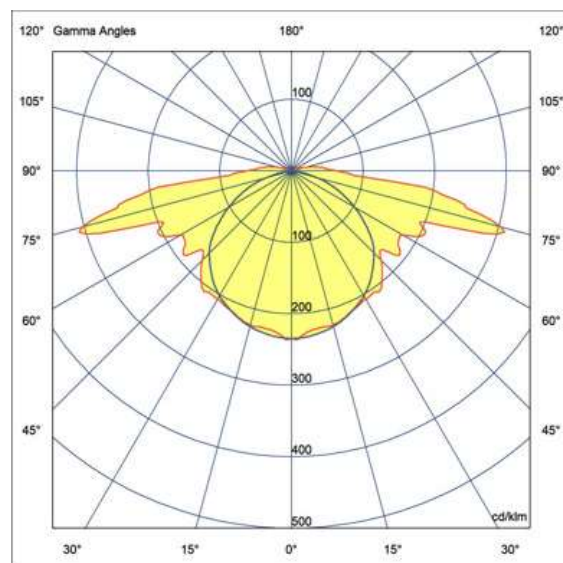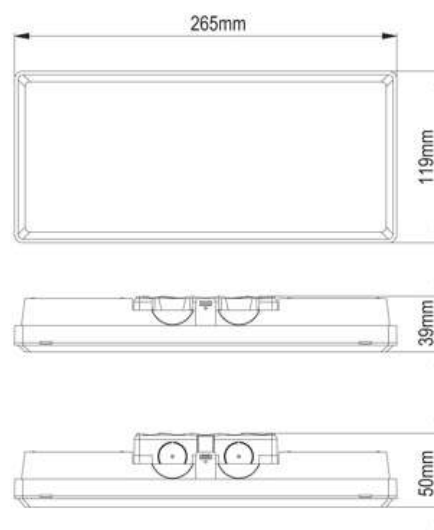

Installation and applications

Environment	Secondary Areas
Application	Offices, Escape Routes, Condos, Residential Areas, Congress Centers, Hotels, Industrial Areas, Stores, Malls, Safety Sign

Mechanical specifications

Height	38 mm
Length	265 mm
Width	119 mm
Weight	0.55 Kg
Cutout length	300 mm
Cutout wide	120 mm
Body material	Polycarbonate
Colour housing	White RAL 9003
Cover material	Transparent polycarbonate
Lens material	Methacrylate
Reflector material	Polycarbonate
Protection grade IP	IP65
Protection grade IK	IK07

Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020

Supplied accessories



18589
STAFFA DERIVAZIONE EASY BOX



18598
CORNICE ESTETICA



18584
ADES SX/DX/BS/UP P.MODULA

Accessories



4128
SCHERMO BAND PRATICA BS



18587
STAFFA BLINDOLUCE P.MODULA



4127
SCHERMO BAND PRATICA SX/DX



18594
SCHERMO DX P.MODULA



18591
GRIGLIA EM 305X135X80



3723
GANCIO SOSPENSIONE 4004/PR



18585
STAFFA PARETE BAND P.MODULA



18596
SCHERMO ALTO P.MODULA



18592
KIT IP65 TUBO BOX BASSO P.MOD



18586
STAFFA CONTROS+CORNICE



4319
KIT BINARIO TRIFASE UP LED



18582
SCHERMO BAND BASSO P.MODULA



18597
TEGOLINO PRO PIOGGIA INOX



4129
SCHERMO BAND PRATICA UP



18590
STAFFA 45° P.MODULA



18583
SCHERMO BAND ALTO
P.MODULA



18580
SCAT INCASSO+CORNIC
P.MODULA



18581
SCHERMO BAND SX/DX
P.MODULA



18599
ADATT INCASSO PRATICA IP65



RA10
BOOSTER AR S LiFe 3.2V 0,5Ah



18593
SCHERMO SX P.MODULA



15078
ICE PACK MODULA



18595
SCHERMO BASSO P.MODULA

Spare parts



415437001
LI-FEPO4 3.2V 0.5AH 14500