



# Pratica Modula

P.MODULA 300 IP65 SE RM

Innovative emergency luminaire with integrated Modula junction bracket that allows programming and wiring without dismantling the luminaire.



## Control system TR

Order code 18640

EAN 8002219886668

## Technical specifications

Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Absorbed SE (max)	3.5 W
Control system	TR
Autonomy	1h, 1.5h, 2h, 3h
Battery included	Yes
Battery type	LiFe
Battery	LiFe 3.2V 1.5Ah
Charging time	12 h
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
LED number	36
Photobiological risk	RG0
Booster battery	RA11f
Colour reflector	White RAL 9003
Colour trim	White RAL 9003
Operation mode	NM
Equivalent power	24WGL
Flux SE booster	450 lm, 300 lm, 250 lm, 170 lm
Flux SE	300 lm, 200 lm, 165 lm, 110 lm
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.41
Glow wire strength	850 °C - 30s.
Mounting	Wall, Ceiling, Recessed, False Ceiling Recessed, Suspension, Track & Rail, Surface/Suspended, Electrified rail, Flush mounting box 3M
Number of Batteries	1
Rest mode	Yes
Visibility distance	21 m
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

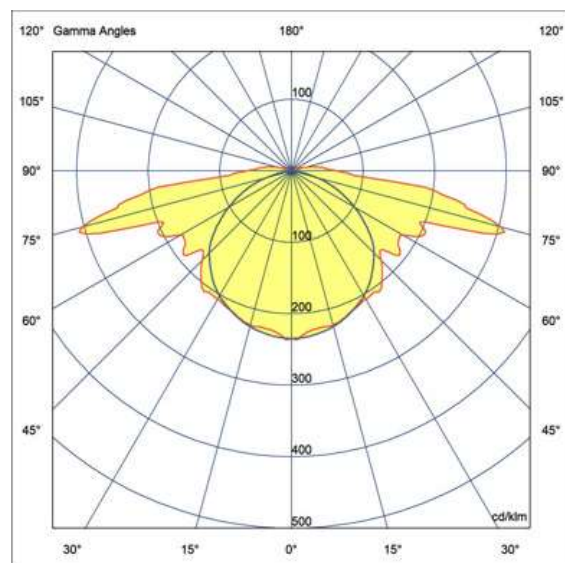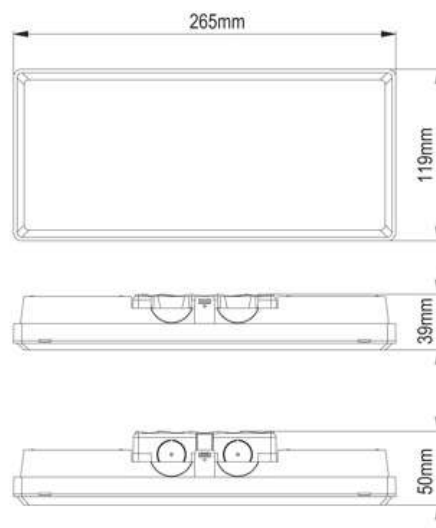

## Installation and applications

Environment **Secondary Areas**

Application

**Offices, Escape Routes, Condos,  
Residential Areas, Congress Centers,  
Hotels, Industrial Areas, Stores, Malls,  
Safety Sign**

### Mechanical specifications

Height	<b>38 mm</b>
Length	<b>265 mm</b>
Width	<b>119 mm</b>
Weight	<b>0.55 Kg</b>
Cutout length	<b>300 mm</b>
Cutout wide	<b>120 mm</b>
Body material	<b>Polycarbonate</b>
Colour housing	<b>White RAL 9003</b>
Cover material	<b>Transparent polycarbonate</b>
Lens material	<b>Methacrylate</b>
Reflector material	<b>Polycarbonate</b>
Protection grade IP	<b>IP65</b>
Protection grade IK	<b>IK07</b>

### Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020

### Supplied accessories



**18589**  
STAFFA DERIVAZIONE EASY  
BOX



**18598**  
CORNICE ESTETICA

### Accessories



**18585**  
STAFFA PARETE BAND  
P.MODULA



**18596**  
SCHERMO ALTO P.MODULA




**18587**  
STAFFA BLINDOLUCE  
P.MODULA



**18593**  
SCHERMO SX P.MODULA



**18594**  
SCHERMO DX P.MODULA



**18591**  
GRIGLIA EM 305X135X80



**3723**  
GANCIO SOSPENSIONE  
4004/PR



**18599**  
ADATT INCASSO PRATICA IP65



**18586**  
STAFFA CONTROS+CORNICE



**18580**  
SCAT INCASSO+CORNICE  
P.MODULA



**18581**  
SCHERMO BAND SX/DX  
P.MODULA



**18595**  
SCHERMO BASSO P.MODULA



**4128**  
SCHERMO BAND PRATICA BS



**18583**  
SCHERMO BAND ALTO  
P.MODULA



**18592**  
KIT IP65 TUBO BOX BASSO  
P.MOD



**15078**  
ICE PACK MODULA



**18584**  
ADES SX/DX/BS/UP P.MODULA



**4129**  
SCHERMO BAND PRATICA UP



**18590**  
STAFFA 45° P.MODULA



**4127**  
SCHERMO BAND PRATICA  
SX/DX



**4319**  
KIT BINARIO TRIFASE UP LED



**18582**  
SCHERMO BAND BASSO  
P.MODULA



**18597**  
TEGOLINO PRO PIOGGIA INOX



**RA11**  
BOOSTER AR M LiFe 3.2V 1,5Ah

### Spare parts



**415436001**  
LI-FEPO4 3.2V 1.5AH 18650