



Pratica Modula

P.MODULA 300 IP65 SA/SE RM

Innovative emergency luminaire with integrated Modula junction bracket that allows programming and wiring without dismantling the luminaire.



Control system TR

Order code 18641

EAN 8002219886682

Technical specifications

Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Absorbed SE (max)	5.8 W
Control system	TR
Autonomy	1h, 1.5h, 2h, 3h
Battery included	Yes
Battery type	LiFe
Battery	LiFe 3.2V 1.5Ah
Charging time	12 h
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
LED number	36
Photobiological risk	RG0
Booster battery	RA11f
Colour reflector	White RAL 9003
Colour trim	White RAL 9003
Operation mode	NM/M
Equivalent power	24WGL
Flux SE booster	450 lm, 300 lm, 250 lm, 170 lm
Flux SA	250 lm
Flux SE	300 lm, 200 lm, 165 lm, 110 lm
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.45
Glow wire strength	850 °C - 30s.
Mounting	Wall, Ceiling, Recessed, False Ceiling Recessed, Suspension, Track & Rail, Surface/Suspended, Electrified rail, Flush mounting box 3M
Number of Batteries	1
Pictogram included	Yes
Rest mode	Yes
Visibility distance	21 m
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

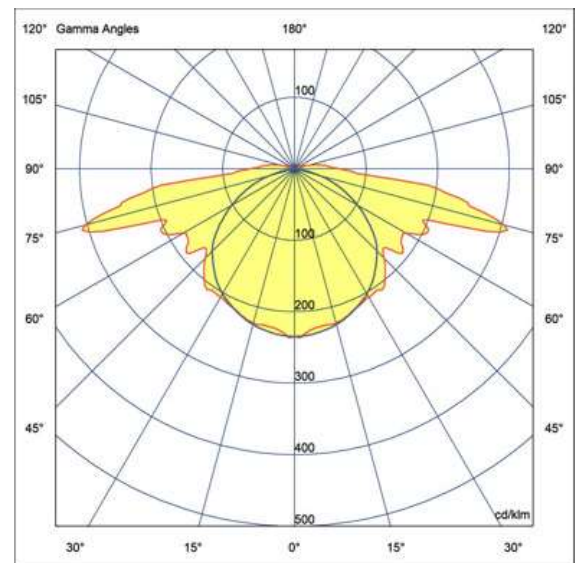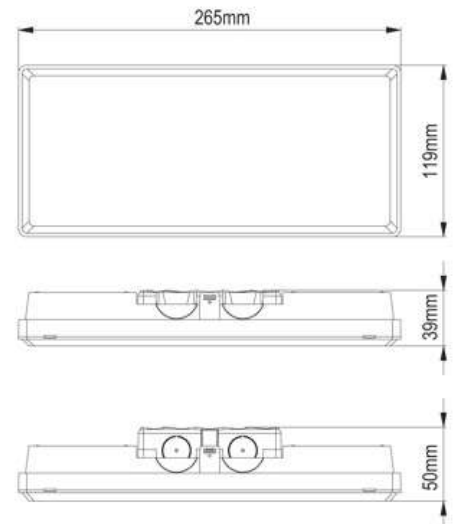

Installation and applications

Environment	Secondary Areas
Application	Offices, Escape Routes, Condos, Residential Areas, Congress Centers, Hotels, Industrial Areas, Stores, Malls, Safety Sign

Mechanical specifications

Height	38 mm
Length	265 mm
Width	119 mm
Weight	0.55 Kg
Cutout length	300 mm
Cutout wide	120 mm
Body material	Polycarbonate
Colour housing	White RAL 9003
Cover material	Transparent polycarbonate
Lens material	Methacrylate
Reflector material	Polycarbonate
Protection grade IP	IP65
Protection grade IK	IK07

Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020

Supplied accessories

	18584 ADES SX/DX/BS/UP P.MODULA		18589 STAFFA DERIVAZIONE EASY BOX		18598 CORNICE ESTETICA
Accessories					
	4128 SCHERMO BAND PRATICA BS		18587 STAFFA BLINDOLUCE P.MODULA		18593 SCHERMO SX P.MODULA
	15078 ICE PACK MODULA		18599 ADATT INCASSO PRATICA IP65		18583 SCHERMO BAND ALTO P.MODULA
	18580 SCAT INCASSO+CORNIC P.MODULA		18581 SCHERMO BAND SX/DX P.MODULA		18595 SCHERMO BASSO P.MODULA
	4129 SCHERMO BAND PRATICA UP		18590 STAFFA 45° P.MODULA		18586 STAFFA CONTROS+CORNICE



4319
KIT BINARIO TRIFASE UP LED



18582
SCHERMO BAND BASSO
P.MODULA



18597
TEGOLINO PRO PIOGGIA INOX



RA11
BOOSTER AR M LiFe 3.2V 1,5Ah



18596
SCHERMO ALTO P.MODULA




18592
KIT IP65 TUBO BOX BASSO
P.MOD



4127
SCHERMO BAND PRATICA
SX/DX



18594
SCHERMO DX P.MODULA



18591
GRIGLIA EM 305X135X80



3723
GANCIO SOSPENSIONE
4004/PR



18585
STAFFA PARETE BAND
P.MODULA

Spare parts



415436001
LI-FEPO4 3.2V 1.5AH 18650