



# Pratica Modula

P.MODULA 1000 IP65 CT SA/SE

Innovative emergency luminaire with integrated Modula junction bracket that allows programming and wiring without dismantling the luminaire.



## Control system CT

Order code 18771

EAN 8002219887382

## Technical specifications

|                           |   |
|---------------------------|---|
| Supply voltage type       | AC  |
| Nominal voltage (AC)      | 230 Vac   |
| Absorbed SE (max)         | 6 W   |
| Control system            | CT  |
| Autonomy                  | 1h, 1.5h, 2h, 3h, 8h  |
| Battery included          | Yes   |
| Battery type              | LiFe  |
| Battery                   | LiFe 3.2V 3Ah   |
| Charging time             | 12 h  |
| Autonomy test time        | 60 min  |
| Autonomy test frequency   | 182 days  |
| Test frequency            | 28 days   |
| Ambient temperature (min) | 0 °C  |
| Ambient temperature (max) | 40 °C   |
| Insulation class          | II  |
| CCT light tone            | 4000 K  |
| LED number                | 36  |
| Photobiological risk      | RG0   |
| Booster battery           | RA11f   |
| Colour reflector          | White RAL 9003  |
| Colour trim               | White RAL 9003  |
| Operation mode            | NM/M/PS   |
| Equivalent power          | 36WGL   |
| Flux SE booster           | 1500 lm, 1000 lm, 850 lm, 550 lm, 190 lm  |
| Flux SA                   | 250 lm  |
| Flux SE                   | 1000 lm, 700 lm, 550 lm, 350 lm, 125 lm   |
| Frequency (max)           | 60 Hz   |
| Frequency (min)           | 50 Hz   |
| Power factor              | 0.46  |
| Glow wire strength        | 850 °C - 30s.   |
| Mounting                  | Wall, Ceiling, Recessed, False Ceiling Recessed, Suspension, Track & Rail, Surface/Suspended, Electrified rail, Flush mounting box 3M |
| Number of Batteries       | 1   |
| Pictogram included        | Yes   |
| Rest mode                 | Yes   |

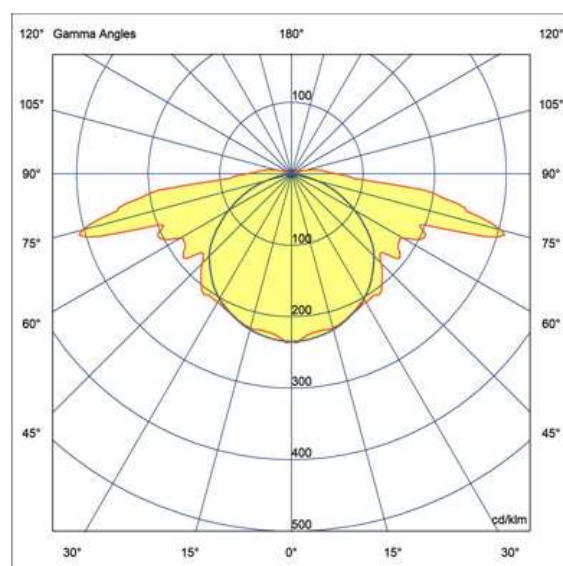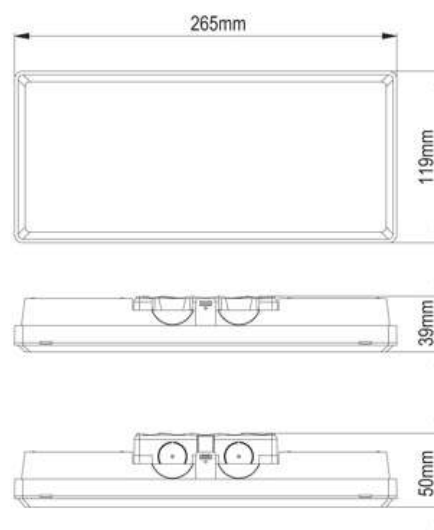

|                            |              |
|----------------------------|--------------|
| Visibility distance        | <b>21 m</b>  |
| Voltage supply range (max) | <b>253 V</b> |
| Voltage supply range (min) | <b>207 V</b> |

## Installation and applications

|             |  |
|-------------|--|
| Environment | <b>Secondary Areas</b>   |
| Application | <b>Offices, Escape Routes, Condos, Residential Areas, Congress Centers, Hotels, Industrial Areas, Stores, Malls, Safety Sign</b> |

## Mechanical specifications

|                     |                                  |
|---------------------|----------------------------------|
| Height              | <b>38 mm</b>                     |
| Length              | <b>265 mm</b>                    |
| Width               | <b>119 mm</b>                    |
| Weight              | <b>0.55 Kg</b>                   |
| Body material       | <b>Polycarbonate</b>             |
| Colour housing      | <b>White RAL 9003</b>            |
| Cover material      | <b>Transparent polycarbonate</b> |
| Lens material       | <b>Methacrylate</b>              |
| Reflector material  | <b>Polycarbonate</b>             |
| Protection grade IP | <b>IP65</b>                      |
| Protection grade IK | <b>IK07</b>                      |

## Certifications and norms

-, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN 300 328 V2.2.2, EN IEC 63000:2018, EN 62493:2010, EN 301 489-1 V2.2.3, EN 301 489-17 V3.2.4

## Supplied accessories



**18598**  
CORNICE ESTETICA



**18589**  
STAFFA DERIVAZIONE EASY BOX



**18584**  
ADES SX/DX/BS/UP P.MODULA

## Accessories



**4129**  
SCHERMO BAND PRATICA UP



**18590**  
STAFFA 45° P.MODULA



**18582**  
SCHERMO BAND BASSO P.MODULA



**18581**  
SCHERMO BAND SX/DX P.MODULA



**15056**  
LG MODULA



**18599**  
ADATT INCASSO PRATICA IP65



**18583**  
SCHERMO BAND ALTO P.MODULA



**18593**  
SCHERMO SX P.MODULA



**18580**  
SCAT INCASSO+CORNIC P.MODULA



**15057**  
FM MODULA



**18595**  
SCHERMO BASSO P.MODULA



**18585**  
STAFFA PARETE BAND P.MODULA



**4128**  
SCHERMO BAND PRATICA BS



**18587**  
STAFFA BLINDOLUCE  
P.MODULA



**4127**  
SCHERMO BAND PRATICA  
SX/DX



**18594**  
SCHERMO DX P.MODULA



**3723**  
GANCIO SOSPENSIONE  
4004/PR



**15058**  
DALI MODULA



**18596**  
SCHERMO ALTO P.MODULA




**18592**  
KIT IP65 TUBO BOX BASSO  
P.MOD



**18586**  
STAFFA CONTROS+CORNICE



**4319**  
KIT BINARIO TRIFASE UP LED



**18591**  
GRIGLIA EM 305X135X80



**18597**  
TEGOLINO PRO PIOGGIA INOX



**RA11**  
BOOSTER AR M LiFe 3.2V 1,5Ah

### Spare parts



**415441002**  
LI-FEPO4 3.2V 3AH 18650 T