



Pratica Modula

P.MODULA 2000 IP65 CT SA/SE

Innovative emergency luminaire with integrated Modula junction bracket that allows programming and wiring without dismantling the luminaire.



Control system CT

Order code 18781

EAN 8002219887405

Technical specifications

Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Absorbed SE (max)	7.8 W
Control system	CT
Autonomy	1h, 1.5h, 2h, 3h, 8h
Battery included	Yes
Battery type	LiFe
Battery	2x LiFe 3.2V 3Ah
Charging time	12 h
Autonomy test time	60 min
Autonomy test frequency	182 days
Test frequency	28 days
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
LED number	36
Photobiological risk	RG0
Booster battery	RA11f
Colour reflector	White RAL 9003
Colour trim	White RAL 9003
Operation mode	NM/M/PS
Equivalent power	36WGL
Flux SE booster	2000 lm, 1750 lm, 1200 lm, 900 lm, 350 lm
Flux SA	250 lm
Flux SE	1700 lm, 1500 lm, 1000 lm, 750 lm, 300 lm
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.47
Glow wire strength	850 °C - 30s.
Mounting	Wall, Ceiling, Recessed, False Ceiling Recessed, Suspension, Surface/Suspended, Electrified rail, Flush mounting box 3M
Number of Batteries	2
Pictogram included	Yes
Rest mode	Yes

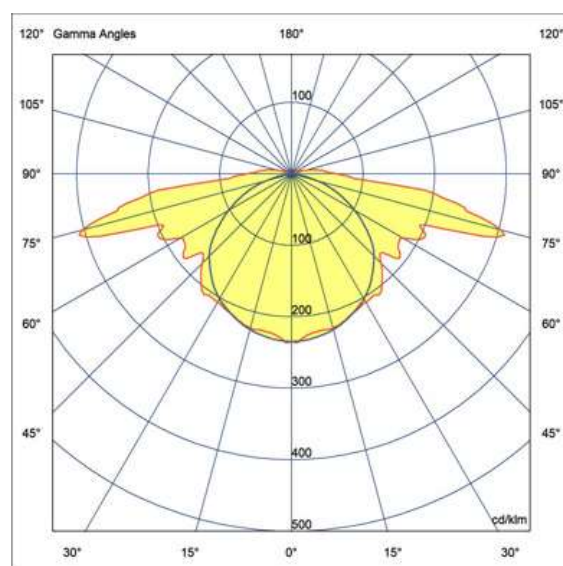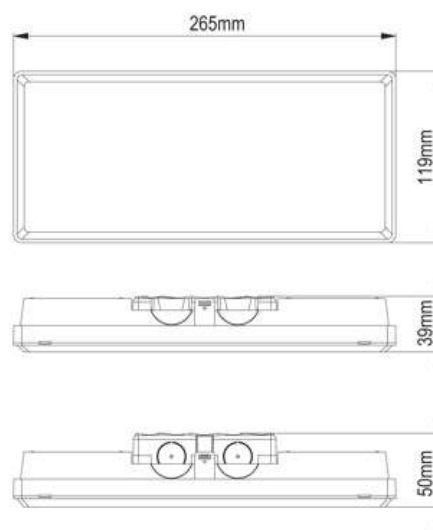

Visibility distance	21 m
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

Installation and applications

Environment	Secondary Areas
Application	Offices, Escape Routes, Condos, Residential Areas, Congress Centers, Hotels, Industrial Areas, Stores, Malls, Safety Sign

Mechanical specifications

Height	38 mm
Length	265 mm
Width	119 mm
Weight	0.55 Kg
Cutout length	300 mm
Cutout wide	120 mm
Body material	Polycarbonate
Colour housing	White RAL 9003
Cover material	Transparent polycarbonate
Lens material	Methacrylate
Reflector material	Polycarbonate
Protection grade IP	IP65
Protection grade IK	IK07

Certifications and norms

-, EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019, EN 61547:2009, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN 300 328 V2.2.2, EN IEC 63000:2018

Supplied accessories



18584
ADES SX/DX/BS/UP P.MODULA



18589
STAFFA DERIVAZIONE EASY BOX




18598
CORNICE ESTETICA

Accessories



4128
SCHERMO BAND PRATICA BS



18587
STAFFA BLINDOLUCE P.MODULA



4127
SCHERMO BAND PRATICA SX/DX



18594
SCHERMO DX P.MODULA



3723
GANCIO SOSPENSIONE 4004/PR



15058
DALI MODULA



4129
SCHERMO BAND PRATICA UP



18590
STAFFA 45° P.MODULA



18582
SCHERMO BAND BASSO P.MODULA



18581
SCHERMO BAND SX/DX
P.MODULA



18599
ADATT INCASSO PRATICA IP65



18580
SCAT INCASSO+CORNIC
P.MODULA



18596
SCHERMO ALTO P.MODULA



4319
KIT BINARIO TRIFASE UP LED



RA11
BOOSTER AR M LiFe 3.2V 1,5Ah

Spare parts



415441002
LI-FEPO4 3.2V 3AH 18650 T



15056
LG MODULA




18583
SCHERMO BAND ALTO
P.MODULA



15057
FM MODULA



18592
KIT IP65 TUBO BOX BASSO
P.MOD



18591
GRIGLIA EM 305X135X80



18585
STAFFA PARETE BAND
P.MODULA



18593
SCHERMO SX P.MODULA



18595
SCHERMO BASSO P.MODULA



18586
STAFFA CONTROS+CORNIC



18597
TEGOLINO PRO PIOGGIA INOX