



Lens Panel LED



LENSPAN 418 M600 U19 C90 SD4K

Order code **40140**

EAN 8002219757531

Technical specifications

Absorbed Power	35 W
Supply voltage type	AC/DC
Nominal voltage (AC)	230 Vac
Ambient temperature (min)	-20 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
Optical protection grade	IP40
LED number	36
Out current (Qty max)	890
Photobiological risk	RG0
Colour consistency	SDCM3
CRI color rendering	>90
Driver type	SD X
Ballast	Constant current LED Smart driver (programmable)
Efficiency	126 lm/W
Equivalent power	4x18w
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.95
Glow wire strength	650 °C - 30s.
Light sensor	Yes
Movement sensor	Yes
Inrush current	28 A
Inrush time	0.15
MTBF driver	80000 h
Luminaire flux	4400 lm
Luminous flux L80B20	60000 h
Mounting	False Ceiling Recessed
Nominal voltage (DC)	216 Vdc
Breaker B16 (Qty max)	20
Breaker C16 (Qty max)	29
Standby absorbed power	0.5 W
THD	18
UGR	19
Voltage supply range (DC)	150+250 VOLT
Voltage supply range (max)	265 V
Voltage supply range (min)	93 V

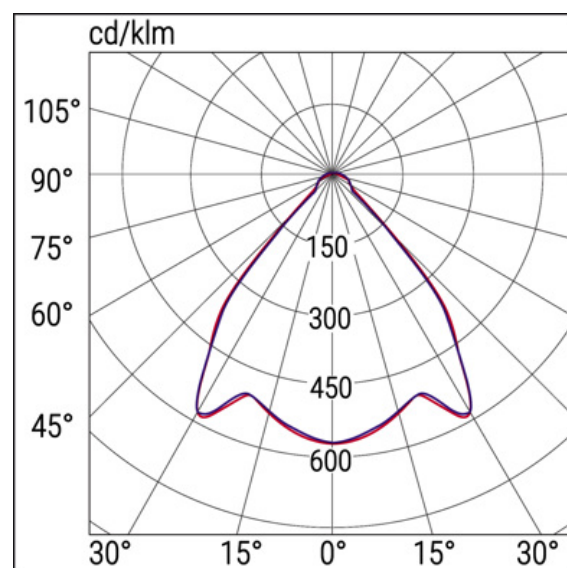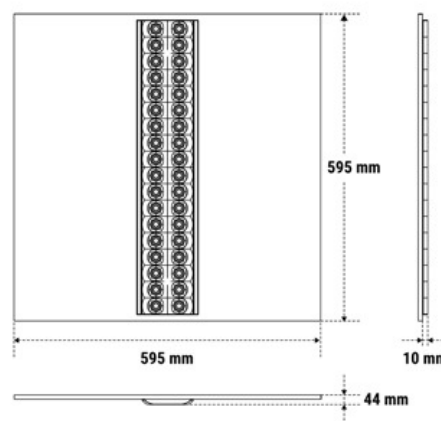

Installation and applications

Environment	Offices
Application	Offices, Shops
Mechanical specifications	
Height	44 mm
Length	595 mm
Width	595 mm
Weight	3.5 Kg
Body material	Sheet steel epoxy coated
Colour housing	White RAL 9003
Lens material	PMMA transparent thermoplastic
Box protection grade	IP20
Protection grade IP	IP20/IP40
Protection grade IK	IK05

Certifications and norms

UK SI 2021 No. 1095, EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019, EN 61547:2009, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013

Supplied accessories



15039
FOTOSENSORE OPTICOM


Accessories



70059
KIT CAVETTO DI SICUREZZA



20089
CORNICE PLAF BACKLITE
600X600



70100
SUSPENSION 4 HOOK
PANELED

Home automation accessories



20104
TRASMETTITORE RADIO
DOMOTICO



15024
MODULO DALI



15022
MODULO RADIO DOMOTICO



21102
CENTRALE DOMOTICA SD-
LGFM



15034
MODULO 1-10V

Inverter accessories



19375
MODULO LGFM INVERTER LED



19376
GUSCIO IP65 INVERTER LED



19358
INV P&L LED SE/SA 1H 20-60V



19355L
INV LED AT/LG AR 9W 55V LIFE



19391
INV EXT AT/LG AR 15W 55V
LIFE



19359
INV P&L LED SE/SA 3H 20-60V