



Design - ArchiEco

DESIGN AE 8W SE 1H IP40

ArchiEco line emergency luminaire with paintable body and clean, elegant design, made from recyclable and partly compostable materials.



Control system TR

Order code **4290A**



EAN **8002219868633**

Technical specifications

Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Absorbed SE (max)	1 W
Control system	TR
Autonomy	1h
Battery included	Yes
Battery type	NiMH
Battery	NiMH 3.6V 1.2Ah
Charging time	24 h
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
LED number	16
Photobiological risk	RG0
Colour reflector	White RAL 9003
CRI color rendering	>80
Operation mode	NM
Equivalent power	11W
Flux SE	120 lm
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.05
Glow wire strength	650 °C - 30s.
Number of Batteries	1
Trim material	PHA BIO
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

Mechanical specifications

Height	35 mm
Length	292 mm
Width	102 mm
Weight	0.4 Kg
Body material	Polycarbonate
Colour housing	White RAL 9003
Cover material	Polycarbonate
Enclosure finiture	Verniciabile/Paintable

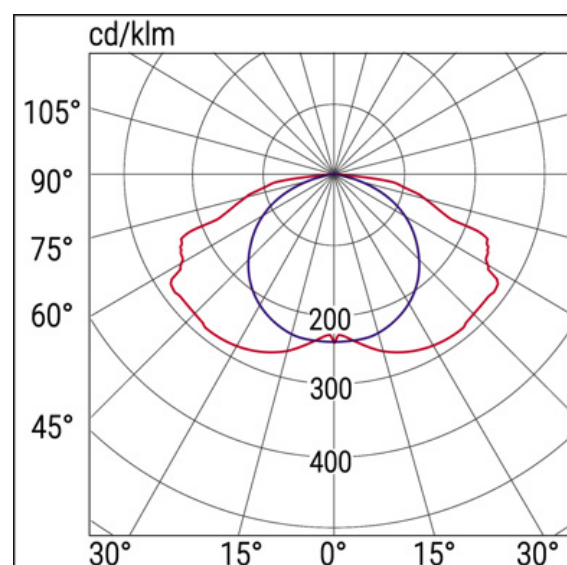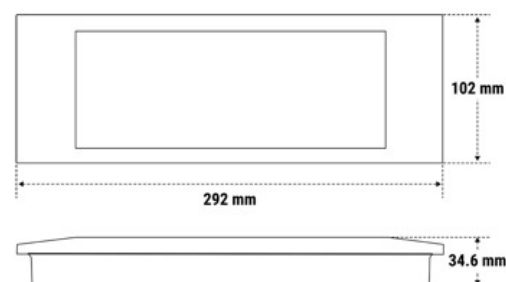

Diffuser finiture	Clear
Protection grade IP	IP40
Protection grade IK	IK05

Certifications and norms

UK SI 2021 No. 1095, EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019, EN 61547:2009, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010

Accessories



4268
SCHERMO BAND BASS
DES/COMP LED



4267
SCHERMO BAND DXSX
DES/COMP LED




4266
STAFFA CONTROSOFFITTO
DES/COMP



4278
ADES 3 SX DX BS DESIGNLED
TECH



4265
STAFFA PARETE X BAND
DES/COMP



4269
SCHERMI DX/SX/BS DES/COMP
LED



3733
INCASSO STILE 6W/11W
3106/IP

Spare parts



415097001
NIMH HT 3.6V1.2A AA PACK
5264