



# Saving Slim

SAVING SLIM 150 IP65 58W 6.5K

Order code **75468**

EAN 8002219895622

## Technical specifications

Absorbed Power	<b>58 W</b>
Supply voltage type	<b>AC</b>
Nominal voltage (AC)	<b>230 Vac</b>
Ambient temperature (min)	<b>-20 °C</b>
Ambient temperature (max)	<b>40 °C</b>
Insulation class	<b>I</b>
CCT light tone	<b>6500 K</b>
Colour consistency	<b>SDCM5</b>
CRI color rendering	<b>&gt;80</b>
Ballast	<b>For constant current LED</b>
Efficiency	<b>110 lm/W</b>
Energy class	<b>E</b>
Equivalent power	<b>2x58w</b>
Frequency (max)	<b>60 Hz</b>
Frequency (min)	<b>50 Hz</b>
Power factor	<b>0.9</b>
Glow wire strength	<b>550 °C - 30s.</b>
Luminaire flux	<b>6380 lm</b>
Luminous flux L80B20	<b>80000 h</b>
Mounting	<b>Ceiling</b>
Voltage supply range (max)	<b>240 V</b>
Voltage supply range (min)	<b>220 V</b>



W	Dimensioni Dimensions mm		
	L	B	H
18	673	85	70
38	1273	85	70
58	1573	85	70


## Installation and applications

Environment	<b>Secondary Areas</b>
Application	<b>Offices, Production, Warehouses</b>

## Mechanical specifications

Height	<b>70 mm</b>
Length	<b>1573 mm</b>
Width	<b>85 mm</b>
Weight	<b>1.9 Kg</b>
Colour housing	<b>Grey RAL 7040</b>
Protection grade IP	<b>IP65</b>
Protection grade IK	<b>IK07</b>

## Certifications and norms

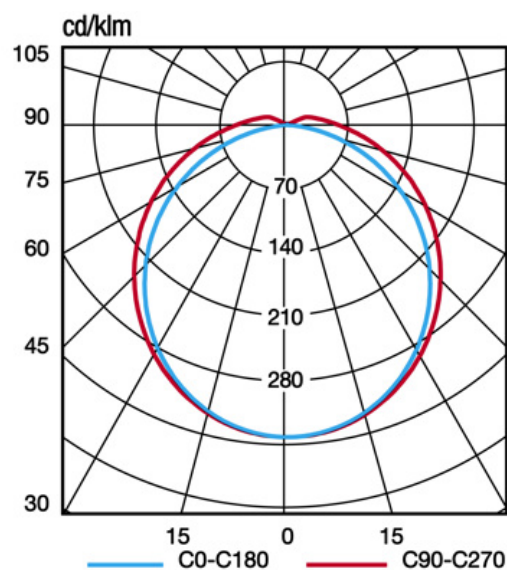

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-1:1989, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019

## Accessories



**201954000**  
KIT 2 GANCI SOSPEN ST EASY  
LED

## Inverter accessories



**15080**  
MODULO DALI SLIM



**19398**  
INV UNIV AT RM 5W 20-240V



**15079**  
MODULO LG SLIM



**19399**  
INV UNIV CT 5W 20-240V



**19367**  
INV P&L LED SE/SA 1H 60-180V



**RA13**  
BOOSTER BAT LiFe 6.4V 1.5Ah



**15037**  
MODULO LGFM



**19371**  
INV P&L LED SE/SA 3H 60-180V