



Ticinque LED

GRANLUCE T5 LED IP65 SA 1LF

Emergency luminaire with high luminous flux for installations in large commercial and industrial areas.




Control system TR

Order code 8598

EAN 8002219877260

Technical specifications

Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Absorbed SE (max)	3.8 W
Control system	TR
Autonomy	1h
Battery included	Yes
Battery type	LiFe
Battery	LiFe 9.6V 1.5Ah
Charging time	12 h
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
LED number	32
Photobiological risk	RG0
CRI color rendering	>80
Operation mode	NM/M
Equivalent power	36WGL
Flux SA	300 lm
Flux SE	1500 lm
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.16
Glow wire strength	850 °C - 30s.
Number of Batteries	1
Visibility distance	28 m
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

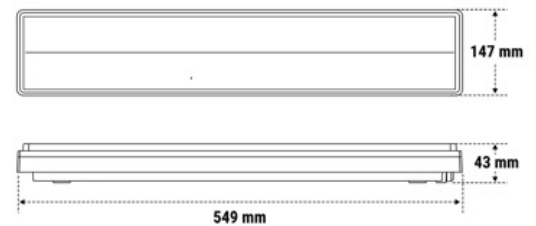


Installation and applications

Environment	Secondary Areas
Application	Offices, Industrial Areas, Public Areas

Mechanical specifications

Height	43 mm
Length	549 mm
Width	147 mm
Weight	2 Kg

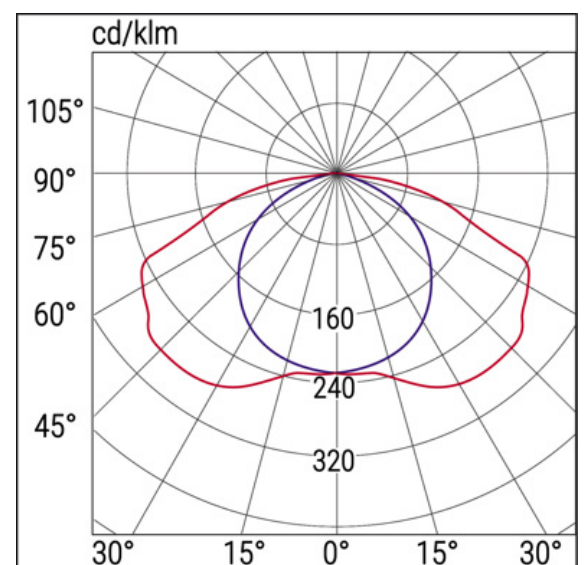

Body material	Polycarbonate
Colour housing	White RAL 9003
Cover material	Transparent polycarbonate
Diffuser finiture	Clear
Reflector material	Polycarbonate
Protection grade IP	IP65
Protection grade IK	IK07

Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019

Accessories



11583
ADES SX TICINQUE LED




2730
INIBIT 973 COMANDO R.MODE



11584
ADES DX TICINQUE LED




15048
MODULO RM PLUG



11585
ADES BS TICINQUE LED



11582
ADES USCITA TICINQUE LED



3905
GRIGLIA ILLUM 685X182X110

Spare parts



415444101
LI-FEPO4 9.6V 1.5AH 18650 3P