



Multi Lens

MULTI LENS GL AT SA LF



High-performance emergency lighting spotlight with three interchangeable lenses for different light beams.

CE






Control system AT

Order code 4394

EAN 8002219891990

Technical specifications

Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Absorbed SE (max)	5 W
Control system	AT
Autonomy	1h, 1.5h, 2h, 3h, 8h
Battery included	Yes
Battery type	LiFe
Battery	LiFe 6.4V 1.5Ah
Charging time	12 h
Autonomy test time	60 min
Autonomy test frequency	182 days
Test frequency	28 days
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
Optical protection grade	IP42
LED number	1
Photobiological risk	RG0
Colour trim	White RAL 9010
CRI color rendering	>70
Diameter	90 mm
Operation mode	NM/M/PS
Equivalent power	24WGL
Flux SA	220 lm
Flux SE	450 lm, 330 lm, 250 lm, 160 lm, 70 lm
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Glow wire strength	850 °C - 30s.
Light sensor	Yes
Lens efficiency	87%, 92%, 85%
Mounting	False Ceiling Recessed
Nunber of Batteries	1
Trim material	Polycarbonate
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

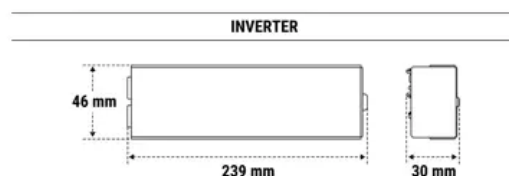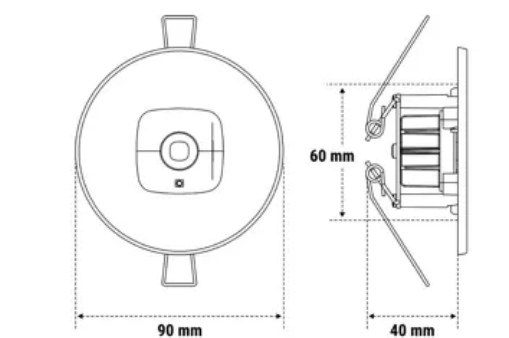

Installation and applications

Environment

Offices

Application	Offices, Public Areas, Shops
Mechanical specifications	
Height	40 mm
Weight	0.4 Kg
Cutout length	60 mm
Body material	Polycarbonate
Colour housing	White RAL 9010
Lens material	PMMA transparent thermoplastic
Box protection grade	IP20
Protection grade IP	IP20/IP42
Protection grade IK	IK07

Certifications and norms


UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020

Accessories



2730
INIBIT 973 COMANDO
R.MODE

Spare parts



415467002
LiFe 6.4V 1.5AH 18650PACK
L140