


# Luminaire

Pratica Modula Easy 200 IP42 SE-SA Rest Mode 200/80 lm (1h/3h)

B18510

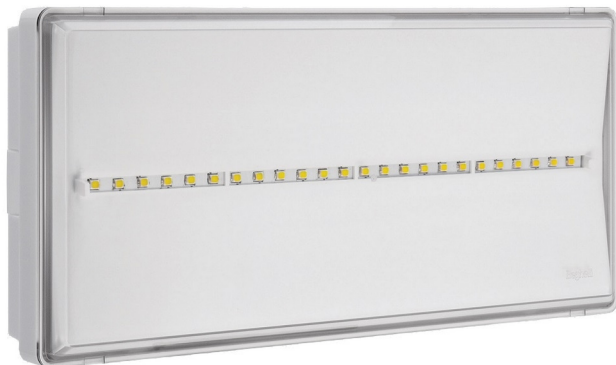

PM EASY EU 200 1/3H IP42 TRSA

|                                                      | B18510                                         |
|------------------------------------------------------|------------------------------------------------|
| Mounting method                                      | Wall surface mounting/ceiling surface mounting |
| Emergency function monitoring system                 | Automatic self test                            |
| Emergency power supply system                        | Peripheral (individual battery)                |
| Lamp type                                            | LED not exchangeable                           |
| With light source                                    | Yes                                            |
| Housing material                                     | Plastic                                        |
| Housing colour                                       | White                                          |
| Material cover                                       | Plastic, transparent                           |
| Voltage type                                         | AC                                             |
| Nominal voltage                                      | 207 - 253 V                                    |
| Light distributor                                    | Diffuser lens/optic/panel                      |
| Degree of protection (IP)                            | IP42                                           |
| Rated ambient temperature according to IEC 62722-2-1 | 0 - 40 °C                                      |
| Luminous flux in emergency mode                      | 200 lm                                         |
| Rated luminous flux according to IEC 62722-2- 1      | 250 - 250 lm                                   |
| Max. system power                                    | 2 W                                            |
| Power consumption in emergency mode                  | 2 W                                            |
| Luminous flux in standby mode                        | 80 lm                                          |
| Colour temperature                                   | 4000 - 4000 K                                  |
| Recognition distance                                 | 25 m                                           |
| Nominal operation time                               | 1 - 3 h                                        |
| Width                                                | 119 mm                                         |
| Height/depth                                         | 39 mm                                          |
| Length                                               | 265 mm                                         |
| Built-in width                                       | 119 mm                                         |

---

## Pratica Modula Easy 200 IP42 SE-SA Rest Mode 200/80 lm (1h/3h)

---

|                       |               |
|-----------------------|---------------|
|                       | <b>B18510</b> |
| Built-in height/depth | 50 mm         |
| Built-in length       | 265 mm        |

|                |               |
|----------------|---------------|
| Brand          | BEGHELLI      |
| Art. N°        | B18510        |
| Sales unit     | pc            |
| EAN PCE        | 8002219886460 |
| EAN QTY PCE    | 1             |
| EAN C01        | 8002219886477 |
| EAN QTY C01    | 12            |
| Intrastat code | 85393110      |