


Luminaires

L PAN M600 U19 C90 ED IP65 4K

B40113

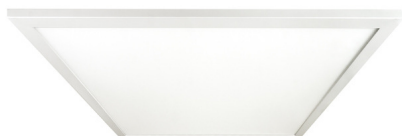

L PAN M600 U19 C90 ED IP65 4K

	B40113
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	Yes
Lamp type	LED not exchangeable
With light source	Yes
Housing material	Aluminium
Housing colour	White
Material cover	Plastic, transparent
Voltage type	AC
Nominal voltage	230 - 230 V
Type of control gear	LED operating device current-controlled
With control gear	Yes
Light distributor	Diffuser lens/optic/panel
Light distribution	Symmetric
Beam angle	Open beam/diffuse
Colour consistency (McAdam ellipse)	SDCM3
Light outlet	Direct
Rated lifetime L70/B50 at 25 °C	100000 h
Degree of protection (IP), front side	IP65
Impact strength	IK05
Protection class according to IEC 61140	II
Emergency power supply system	None
Rated ambient temperature according to IEC 62722-2-1	-20 - 40 °C
Filament test according to IEC 60695-2-11	650 °C - 30 s
Luminaire efficacy	111 - 111 lm/W
Max. system power	36 W

L PAN M600 U19 C90 ED IP65 4K

	B40113
Rated luminous flux according to IEC 62722-2- 1	4000 - 4000 lm
Colour of light	White
Colour temperature	4000 - 4000 K
Colour rendering index CRI	90-100
Width	595 mm
Height/depth	12 mm
Length	595 mm
Built-in length	595 mm
Built-in width	595 mm
Built-in height/depth	41 mm
Total harmonic distortion (THD)	10 %
Photobiological safety according to EN 62471	RG0
Brand	BEGHELLI
Art. N°	B40113
Sales unit	pc
EAN PCE	8002219755391
EAN QTY PCE	1
Intrastat code	85393110