



Formula 65 LED

F65 LED 24W IP65 SE 1/3 LF



IP65 waterproof emergency luminaire, with adjustable autonomy and possibility of additional battery.



Control system TR

Order code 19206N

EAN 8002219878779

Technical specifications



Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Absorbed SE (max)	2.6 W
Control system	TR
Autonomy	1h, 3h
Battery included	Yes
Battery type	LiFe
Battery	LiFe 3.2V 1.5Ah
Charging time	12 h
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
LED number	32
Photobiological risk	RG0
CRI color rendering	>80
Operation mode	NM
Equivalent power	24W
Flux SE	450 lm, 160 lm
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.06
Glow wire strength	850 °C - 30s.
Mounting	Wall, Ceiling, Recessed, Suspension
Nunber of Batteries	1
Visibility distance	25 m
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

Installation and applications

Environment	Secondary Areas
Application	Offices, Industrial Areas, Public Areas

Mechanical specifications

Height	49 mm
Length	152 mm
Width	354 mm
Weight	1.1 Kg
Body material	Polycarbonate
Colour housing	White RAL 9003
Cover material	Transparent polycarbonate

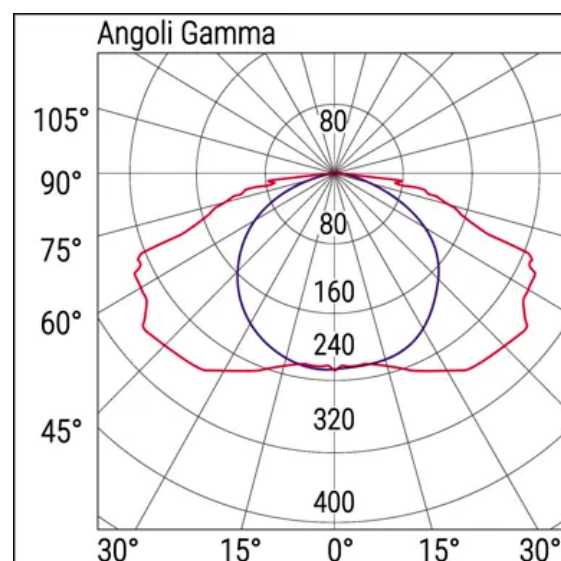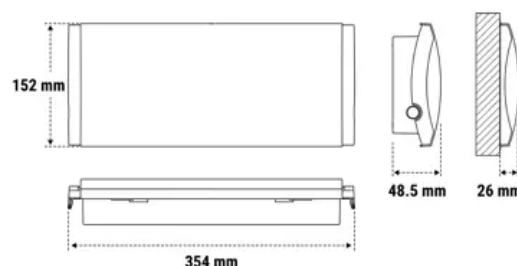

Diffuser finiture	Clear
Protection grade IP	IP65
Protection grade IK	IK07

Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020

Supplied accessories



19040
INCASSO + CORNICI F65

Accessories



2730
INIBIT 973 COMANDO R.MODE



19042
SCHERMO BANDIERA DX/SX F65




3912
GRIGLIA EM 440X215X99



19043
SCHERMO BANDIERA BASSO F65



15048
MODULO RM PLUG



19041
STAFFA CONTROSOFFITTO F65



308419000
ADES SX/DX/BS/UP F65 LED EU



19045
STAFFA A PARETE X BANDIERA F65

Spare parts



415436001
LI-FEPO4 3.2V 1.5AH 18650