

Saving Stagna TubiLED

Waterproof ceiling luminaire

The latest generation LED tubes, included, allow to considerably reduce consumption compared to traditional ceiling luminaires with fluorescent tube.

This appliance is characterized by practicality and installation reliability. This is thanks to the monocoque hooks in fibreglass reinforced nylon (also available in stainless steel) and to the ceiling fixing brackets, which directly hook the luminaires housing. The housing is in self-extinguishing, injection-moulded, UV-stabilized polycarbonate, dyed in grey RAL 7035, equipped with a seal in anti-ageing polyurethane foam. The size of the product is very limited with obvious advantages in all phases of storage and transport.



GENERAL CHARACTERISTICS

Equivalent Power* 1x18, 2x18, 1x36, 2x36, 1x58, 2x58 W

Power supply 230 V - 50/60 Hz

Standard EN60598-1; EN60598-2-1; EN 62471

Protection grade IP65

Working temp. -20°C ÷ +40°C

Mounting ceiling, suspension, electrified track

Housing Polycarbonate, RAL 7035
and closing hooks in polyamide


Optics powder-coated steel in white
reflective colour

Socket G13

Light source LED tubes (Supplied)

Colour temperature 4000K, 6500K

* Equivalent power for comparison with fluorescent tube fixtures

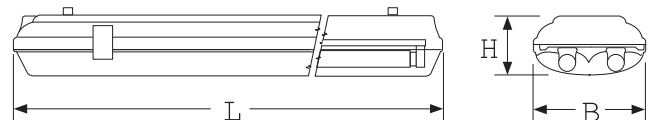

W	• Dimensions (mm) •			Weight kg
	L	B	H	
1x18, 2x18	674	121	82	1,4
1x36, 2x36	1264	121	82	2,6
1x58, 2x58	1564	121	82	3,3

Saving Stagna TubiLED

LED Tubes Supplied

	W	Order Code	Description	EAN	Power W	Colour Temp.	Colour rend. index	Flux of LEDs (lm) Tj=25°C	Flux of fixture (lm)	Luminous Efficiency (lm/W)	Energy Eff. Class	Package single/multi
NEW	1x18	72015	SAVING IP65 TUBI LED 118 4000K	8002219745927	9	4000K	>80	1000	800	90	A++	1/1
	2x18	72001	SAVING IP65 TUBI LED 218 4000K	8002219719676	18	4000K	>80	2000	1600	90	A++	1/1
NEW	1x36	72016	SAVING IP65 TUBI LED 136 4000K	8002219745934	18	4000K	>80	2000	1700	95	A++	1/1
	2x36	72003	SAVING IP65 TUBI LED 236 4000K	8002219719683	36	4000K	>80	4000	3400	94	A++	1/1
NEW	1x58	72017	SAVING IP65 TUBI LED 158 4000K	8002219745941	24	4000K	>80	2800	2300	95	A++	1/1
	2x58	72005	SAVING IP65 TUBI LED 258 4000K	8002219719690	58	4000K	>80	5400	4600	96	A++	1/1
	2x18	72002	SAVING IP65 TUBI LED 218 6500K	8002219722669	18	6500K	>80	2000	1600	90	A++	1/1
	2x36	72004	SAVING IP65 TUBI LED 236 6500K	8002219722676	36	6500K	>80	4000	3400	94	A++	1/1
	2x58	72006	SAVING IP65 TUBI LED 258 6500K	8002219722683	58	6500K	>80	5400	4600	96	A++	1/1

Warning: the declared characteristics refer to a fixture equipped with original lamps supplied (LED Tubes Beghelli)

WATERPROOF
CEILING

CEILING INSTALLATION



- Ceiling brackets supplied

INSTALLATION ON ELECTRIFIED TRACK OR SUSPENSION



- Ceiling brackets with suspension hooks supplied

