

Ticinque TuttoLED

emergency



Autonomy up to 5hrs, luminous flux up to 400lm.



Available in both IP42 and IP65 protection ratings; with pictograms installed, the distance of visibility is 28m.



Equipped with PG16/20 quick connector and IP Plug membranes for quick connections on all 4 sides.

Applications

Industry, services

Characteristics

Power supply 230VAC \pm 10%, 50÷60Hz

Mounting Wall, ceiling


Recharging time 12h

Housing Polycarbonate, grey RAL 7035

Optics Symmetrical, white

Screen Clear polycarbonate

Compliance EN 60598-1, EN 60598-2-22, UNI EN 1838, UNI 11222, EN 62034

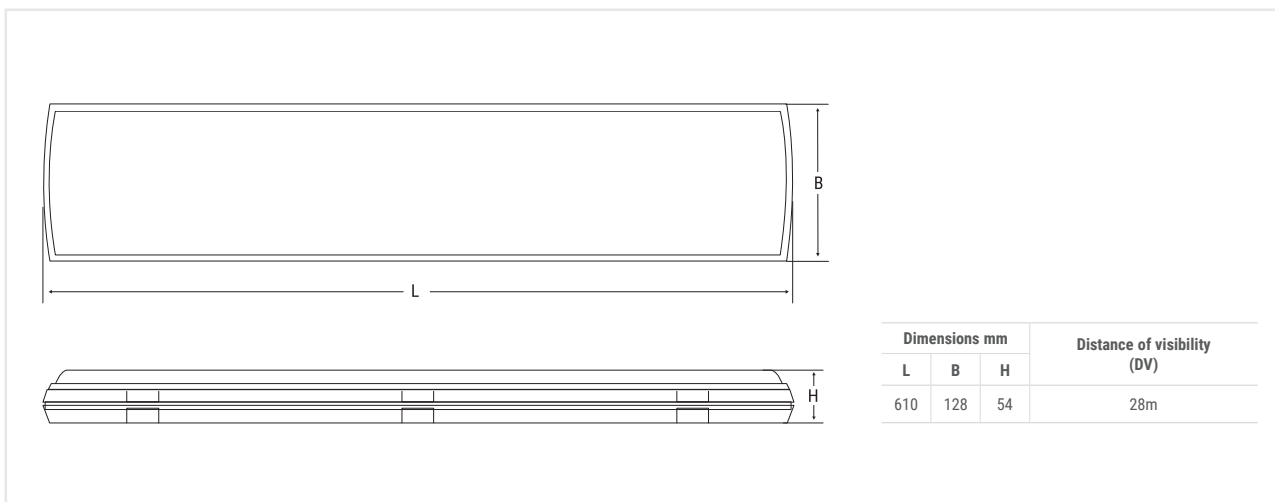


Dimensions mm			Distance of visibility (DV)
L	B	H	
610	128	54	28m

034

Performance according to EN 1838

Height (m)	Centre distance (m) ESCAPE ROUTES		Illuminated surface area (m) LARGE AREAS	
	Wall	Ceiling	Wall	Ceiling
2.5	7	-	6x6	-
3	-	12	-	9x9
Lighting >1lx at floor level along the centre line without reflections Emax/Emin <40			Lighting >0.5lx at floor level without reflections Emax/Emin <40	
Performance with reference to luminaire Order Code 8595 400 lm			Maintenance coefficient 0.8	

TICINQUE TUTTOLED

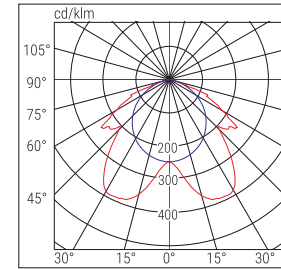



■ C90-C270





■ C0-C180

	Order Code	W eq.	Description	Version	Autonomy h	Battery	FLUX SE lm	FLUX SA lm		Input power		Weight Kg	Packaging Single/ Multi pack	Notes
								DC	AC	DC	AC			
TR	8594	18	TICINQUETUTTOLED IP42 18SE5P	SE	5	LiFe 9.6V 1.5Ah	400	-	5W	1.8	1/6	IP42	STANDARD	
	8596	18	TICINQUETUTTOLED IP65 18SA5P	SA/SE	5	LiFe 9.6V 1.5Ah	400	220	8W	2.0	1/6	IP65		
	8595	18	TICINQUETUTTOLED IP65 18SE5P	SE	5	LiFe 9.6V 1.5Ah	400	-	5W	2.0	1/6	IP65		

ACCESSORIES - included

	CABLE GLAND MEMBRANE M16/20 IP65		CABLE CONDUIT GLAND PG16/PG20 (IP65 version) Order Code 3727
--	---	--	---

ACCESSORIES - to be ordered separately

	PROTECTIVE GRILLE Dimensions: 685x182x110 mm Order Code 3905		STICKER RH - 18 W Order Code 11594
	STICKER LH - 18 W Order Code 11593		STICKER DOWN - 18 W Order Code 11595

