


Connection sleeves for 4- and 5-core plastic cables complete with screw connector

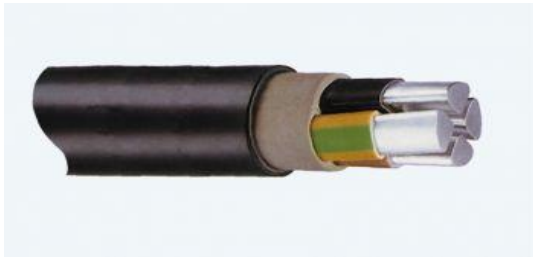

Application

indoors and in the ground, in water
cable ducts, indoors

connecting plastic cables with
insulation made of PVC, PE and PU without
reinforcement

- Suitable for compression connectors for aluminum and copper cables

properties

- Halogen free
- UV-resistant
- Resistant to environmental influences, alkaline earths and chemical influences
- Crosslinked polyolefin hoses coated with hot melt adhesive
- Unlimited storage
- Cross Waterproof
- Good electrical insulation values

4- to 5-core connection sleeves for plastic cables suitable for compression connectors

N (A) YY, N (A) 2Y (2) Y, N (A) 2X (2) Y Number of cores, cross section mm ²	Number of screw connectors cross-section mm	Article number	Type
5 x 1.5 - 5 x 6	5 x 1.5 - 6 rm / r	500 409	SM 5 1.5 - 6 V
5x6 - 5x16	5 x 6 - 16 re	500 422	SM 5 6 - 16 V
5x6 - 5x35	5 x 6 - 35 rm / sm / re / se	500 410	SM 5 6 - 35 V
4 x 10 - 25	4 x 10 - 25 rm/sm/re/se	500 423	SM 4 10 - 25 V
4 x 16 - 50	4 x 16 - 50 rm/sm/re/se	500 621	SM 4 16 - 50 V
4 x 25 - 95	4 x 25 - 95 rm/sm/re/se	500 630	SM 4 25 - 95 V
4 x 95 - 50	4 x 95 - 150 rm/sm/re/se	500 820	SM 4 95 - 150 V
4 x 120 - 185	4 x 120 - 185 rm/sm/re/se	500 822	SM 4 120 - 185 V

(r = round, s = sector-shaped, e = single-stranded, m = stranded)