


RQLG1-M | metric thread

Connectors FLEXAquick for ROHRflex corrugated plastic tubings

Plastic connector, quick-type, straight, metric outer thread, integrated snap-in sleeve, conically sealed

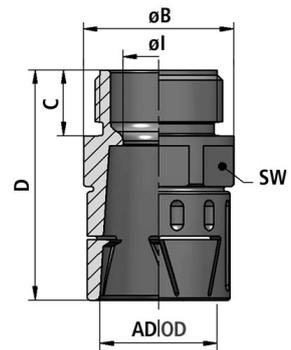

Temperature: -40°C ... +120°C

Material: PA plastics

IP class [acc. to EN 60529]: IP 65

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- highly resistant to acids and solvents
- free of silicone, cadmium, halogen

APPLICATIONS:

- Application: machine and plant constructions / automotive / automation / electrical installations



FLEXA No.	OD [mm]	Colour	Thread type	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15115010212	10,0	Black	M12 x 1,5	7,0	17,0	11,0	34,5	16	0,500	50
15115013216	13,0	Black	M16 x 1,5	10,0	20,0	11,0	37,0	18	0,600	50
15115015220	15,8	Black	M20 x 1,5	12,5	24,0	11,0	38,0	22	0,800	50
15115018220	18,5	Black	M20 x 1,5	14,0	26,0	13,0	40,0	27	1,000	50
15115018225	18,5	Black	M25 x 1,5	14,0	26,0	13,0	40,0	27	1,000	50
15115021220	21,2	Black	M20 x 1,5	14,0	29,5	13,0	45,5	27	1,200	50
15115021225	21,2	Black	M25 x 1,5	14,0	29,5	13,0	45,5	27	1,200	50
15115028225	28,5	Black	M25 x 1,5	18,8	36,0	13,0	49,0	35	1,700	25
15115028232	28,5	Black	M32 x 1,5	18,8	36,0	13,0	49,0	35	1,700	25
15115034232	34,5	Black	M32 x 1,5	26,0	44,0	15,0	54,0	43	2,700	25
15115034240	34,5	Black	M40 x 1,5	26,0	44,0	15,0	54,0	43	2,700	25
15115042240	42,5	Black	M40 x 1,5	35,0	52,0	16,0	61,0	53	4,300	25
15115042250	42,5	Black	M50 x 1,5	35,0	52,0	16,0	61,0	53	4,300	25
15115054250	54,5	Black	M50 x 1,5	45,0	64,0	16,0	68,0	66	5,900	10
15115054263	54,5	Black	M63 x 1,5	45,0	64,0	16,0	68,0	66	5,900	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.