
Protective hose systems

ROHRflex PA 6 AD15,8

0233202012

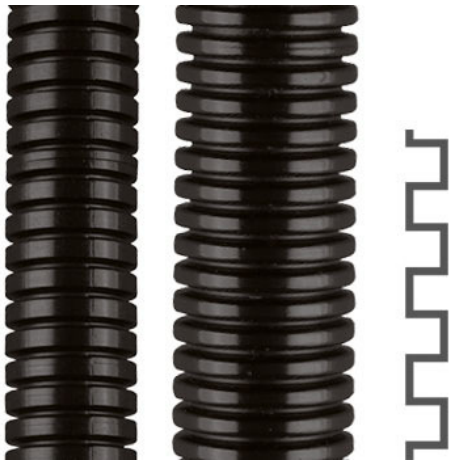

ROHRflex PA 6 AD15,8

	0233202012
Nominal diameter	15.8 mm
Nominal size in inch	3/8 inch
Compressive strength	125 N
Operating temperature	-40 - 120 °C
Bending radius, static	35 mm
Bending radius, dynamic	55 mm
Oil resistant	Yes
Colour	Black
Sheathing material	Not sheathed
Flame accelerating	No
Bending strength	Flexible
Tensile strength	100 N
Lengthwise slotted	No
Closable (two-part)	No
Halogen free	Yes
With draw wire	No
High conducting inner coating	No
Fire resistance according to UL94	V0
Inner diameter	12 mm
Approved according to DIN EN 61386-23	Yes
Approved according to LUL/British Standard	Yes
Approved according to Lloyd's Register TA	Yes
Outer diameter	15.8 mm
Approved according to UTAC	No
Approved according to DIN 5510	Yes

*Documents and visuals are non-contractual, technical specifications are subject to change without notice.

ROHRflex PA 6 AD15,8

	0233202012
Approved according to VdTÜV/GGVSEB	Yes

Brand	FLEXA
Art. N°	0233202012
Sales unit	m
EAN PCE	40251131054241
EAN QTY PCE	1
EAN C01	4025113105424
EAN QTY C01	50
Intrastat code	39173200

*Documents and visuals are non-contractual, technical specifications are subject to change without notice.