


Protective hose systems

LIQUID-TIGHT-EF. Gaine de protection en métal- acier galvanisé-
gaine

2080111012

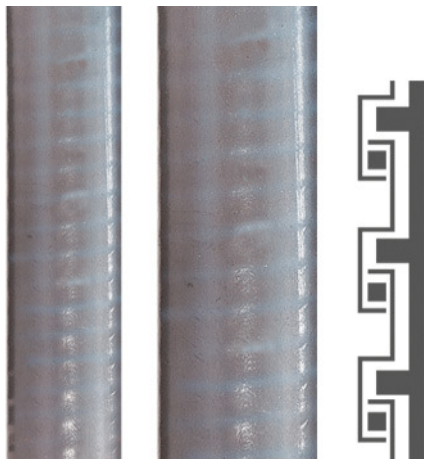

LIQUID-TIGHT-EF. Protective metal conduit, galvanized steel, PVC sheathing, extra liquid proof.

	2080111012
Nominal size in inch	3/8 inch
Outer diameter	18 mm
Inner diameter	12.5 mm
Material	Steel
Surface protection	Untreated
Sheathing material 1st coating	Polyvinyl chloride (PVC), flame retardant
Sheathing material 2nd coating (exterior)	Not sheathed
Sealing	Special fibre sealing
Compressive strength	1250 N
Operating temperature	-25 - 90 °C
Degree of protection (IP)	IP68
Tensile strength	500 N
Bending radius, static	145 mm
Weight	0.26 kg/m
Colour	Grey
Suspended load capacity	450 N
Electrical characteristics	With electrical insulating characteristics
Flame accelerating	No
Suitable for EX-applications	No
With approval according to UL	No

LIQUID-TIGHT-EF. Gaine de protection en métal- acier galvanisé- gaine

Brand	FLEXA
Art. N°	2080111012
Sales unit	m
EAN PCE	4025113134424
EAN QTY PCE	1
EAN QTY C01	50
Intrastat code	83071000