


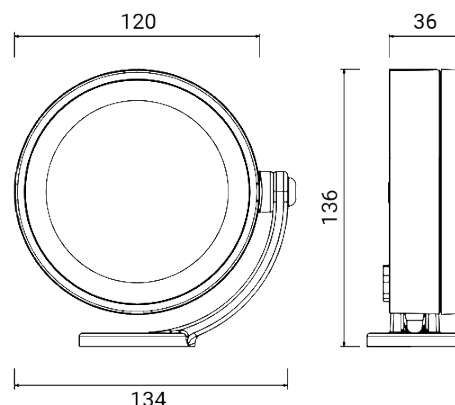

Outdoor spotlight for wall, stem and ground installation

Adjustable luminaire with stable fastening in the chosen point

Material: low copper content die-cast aluminium

Diffuser: ultra-white transparent tempered glass, sealed to the frame

Light source: mains voltage LED module, compatible with phase-cut dimmers

The spotlight is hermetically sealed with a two-component resin and supplied with a 1,5 m H05RN-F buriable cable. The cable can pass through a special hole in the base of the arm

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

24V 24V low voltage

MT7 7 m cable length

HC Honeycomb optic 10°

Dimensions	Ø 120 x H 136 x 36 mm
Light source	LED
Wattage	10 W
Power supply	220-240 V 50/60 Hz
Light source output	895 lm
System output	691 lm
System efficiency	69 lm/W
Color Rendering Index – CRI	≥80
LED energy class	E (4000K), F (2700K), F (3000K)
Electrical insulation class	Class I
IP rating	IP 67
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 +2-1
Weight	0.71 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
BR	BRONZE
VE	GREEN

on request:

CO	CORTEN
BI	WHITE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K


OPTIC

standard	40°
optional optics	
12	12°
90	90°

CLOCK 120 LED 10W

4664 AN27K ANTHRACITE - 2700K - 40°

ACCESSORIES

CLOCK STEM H 600  4693	CLOCK STEM H 1200  4694	CLOCK STEM H 2300  4699	ACCESSORIES WATERPROOF CONNECTOR  1941
ACCESSORIES WATERPROOF CONNECTOR  1944	ACCESSORIES WATERPROOF CONNECTOR  1942	CLOCK 120 SHIELD  4669	CLOCK STEM JOINT  4695
CLOCK SPIKE  4691	CLOCK WALL ARM 380  4692	CLOCK STEM WALL SUPPORT  4681	CLOCK STEM WALL 900  4682
CLOCK STEM WALL 1800  4683	CLOCK STRAP  1602	CLOCK WALL ARM 680  4690	

CLOCK

THE SERIES

