

Hydraulic cable cutters

Hydraulic cable cutter „HH 32-ST“

- in case • cutting head can be rotated 180°
- for copper and aluminium cable • ACSR: Ø 28 mm
- soft CU round bar: Ø 25 mm • soft AL round bar: Ø 22 mm
- soft steel round bar: Ø 16 mm
- CU/AL wire stranded: Ø 32 mm



Art. no.	TL	Ø	kg	PU
216402	580	32	5,300	1

Hydraulic cutter „HH 85-ST“

- in case • cutting head can be rotated 180°
- with hydraulic quick connections • copper and aluminium cable
- armoured steel cable

For technical data, see page 20



Art. no.	TL	Ø	kg	PU
216404	690	85	7,000	1

Hydraulic cutting headstocks

Hydraulic cutting headstock

- in bag • with hydraulic quick connections
- copper and aluminium cable • armoured steel cable

For technical data, see page 20




Art. no.	Ø	kg	PU
216408	85	11,300	1

Hydraulic cutting headstock

- in bag • with hydraulic quick connections
- copper and aluminium cable • armoured steel cable

For technical data, see page 20

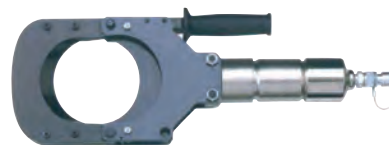

Art. no.	Ø	kg	PU
216410	120	14,600	1

Hydraulic cutting headstock

- in bag • with hydraulic quick connections
- copper and aluminium cable • armoured steel cable

For technical data, see page 20



Art. no.	Ø	kg	PU
216415	95	11,300	1