

Steel cable ties, accessories



Steel cable ties, SS 316 (V4A) with ball closure

made from stainless steel 316 (DIN 1.4401), corrosion and radiation resistant, non-magnetic, extremely resistant to high temperatures (steel -80 °C to +538 °C) and aggressive chemicals, steel thickness 0.3 mm.

For use in machinery, vehicles, signalling, shipping and mining, in the food and chemical industries, in power plants, underground systems, on drilling platforms, wind-power generation plants and telecommunications, radio technology, stage construction, trade fair construction.



Art. no.	TL	width	mm	kg	kg/100	PU	PE
262940/125	125	4,5	22	45	0,400	100	100
262940/152	152	4,5	25	45	0,230	100	100
262940/200	200	4,5	50	45	0,280	100	100
262940/250	250	4,5	65	45	0,330	100	100
262940/300	300	4,5	75	45	0,420	100	100
262940/360	360	4,5	102	45	0,450	100	100
262940/520	520	4,5	152	45	0,660	25	100
262950/152	152	8,0	25	113	0,480	100	100
262950/200	200	8,0	50	113	0,680	100	100
262950/300	300	8,0	75	113	0,750	100	100
262950/360	360	8,0	102	113	0,920	100	100
262950/520	520	8,0	152	113	1,280	25	100
262950/680	680	8,0	203	113	1,550	25	100
262950/840	840	8,0	254	113	1,840	25	100
262950/1050	1050	8,0	318	113	2,560	25	100
262960/290	290	12,0	80	272	1,500	100	100
262960/360	360	12,0	102	272	1,700	100	100
262960/520	520	12,0	152	272	2,800	25	100
262960/680	680	12,0	203	272	3,300	25	100
262960/840	840	12,0	254	272	4,500	25	100
262960/1000	1000	12,0	302	272	5,000	25	100
262960/1200	1200	12,0	351	272	5,500	25	100

Steel cable ties, SS 316 (V4A) with ratchet function

made from stainless steel 316 (DIN 1.4401), corrosion and radiation resistant, non-magnetic, extremely resistant to high temperatures (steel -80 °C to +538 °C) and aggressive chemicals, steel thickness 0.3 mm; installation without additional tools.

For use in machinery, vehicles, signalling, shipping and mining, in the food and chemical industries, in power plants, underground systems, on drilling platforms, wind-power generation plants and telecommunications.



Art. no.	TL	width	mm	kg	kg/100	PU	PE
262970/1100	1100	10,0	330		5,500	10	100
262970/1315	1315	10,0	380		6,000	10	100


Steel cable ties, SS 316 (V4A) with ball closure

with cable protection sleeve made of epoxy resin polyester, free from halogen, black made from stainless steel 316 (DIN 1.4401), corrosion and radiation resistant, non-magnetic, extremely resistant to high temperatures (steel -80 °C to +538 °C) and aggressive chemicals, steel thickness 0.3 mm.

For use in machinery, vehicles, signalling, shipping and mining, in the food and chemical industries, in power plants, underground systems, on drilling platforms, wind-power generation plants and telecommunications, radio technology, stage construction, trade fair construction.

Benefits:

- Soft edges
- Easy installation comfort and handling
- Fully coated to prevent contact corrosion
- Gentle fixture

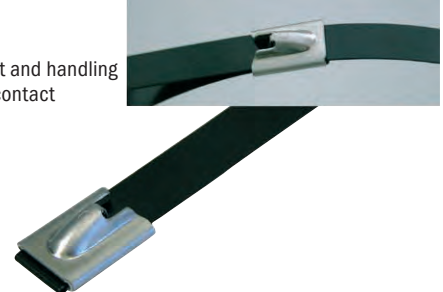

Art. no.	TL	width	mm	kg	kg/100	PU	PE
262942/125	125	4,5	22	45	0,190	100	100
262942/152	152	4,5	25	45	0,230	100	100
262942/200	200	4,5	50	45	0,280	100	100
262942/250	250	4,5	60	45	0,330	100	100
262942/300	300	4,5	75	45	0,420	100	100
262942/360	360	4,5	102	45	0,450	100	100
262942/520	520	4,5	152	45	0,660	25	100
262952/152	152	8,0	25	113	0,480	100	100
262952/200	200	8,0	50	113	0,680	100	100
262952/300	300	8,0	75	113	0,750	100	100
262952/360	360	8,0	102	113	0,920	100	100
262952/520	520	8,0	152	113	1,280	25	100
262952/680	680	8,0	203	113	1,550	25	100
262952/840	840	8,0	254	113	1,840	25	100
262952/1050	1050	8,0	318	113	2,560	25	100
262962/290	290	12,0	80	272	1,500	100	100
262962/360	360	12,0	102	272	1,700	100	100
262962/520	520	12,0	152	272	2,800	25	100
262962/680	680	12,0	203	272	3,300	25	100
262962/840	840	12,0	254	272	4,500	25	100
262962/1000	1000	12,0	302	272	5,000	25	100
262962/1200	1200	12,0	351	272	5,500	25	100

Tensioning tools for steel cable ties

Steel cable ties are tensioned by the tool and can be cut off flush. Cutting is implemented manually using a hand lever, the force cannot be pre-set. Only suitable for steel cable ties (coated and not coated).

Processing width: 4.5 - 12.0 mm, max. thickness of cable ties: 0.3 mm



Art. no.	width	material	kg	PU
262159	4.5 - 12.0	metal	0,560	1