

LINEARELED EVO 360



Logistic Data

Code	21208
Product	LINEARELED EVO 360
Box quantity (pcs.)	20/200
EAN Box	8012878212081
Gross weight of box in kg	9.6
Weight of single lamp in kg	0.059
Length of box in m	0.38
Width of box in m	0.445
Height of box in m	0.23
ETIM class name	LED lamp
Beam angle	360°
Brand of LED	EPISTAR
Power Factor	>0.5

Electrical Parameters

Lamp nominal wattage	6 W
Rated wattage	6.0 W
Nominal current (mA)	55 mA
Energy Consumption kWh/1000h	6


Light Application Parameters

Luminous flux	700 lm
Luminous efficiency of lamp	116.66 lm/W
Colour temperature	3000 K
Colour rendering index Ra	≥80
LLMF at the end of nominal life	0.65(40000h)
SDCM	2.0
Imax(cd)	83.45
Switching cycles	20000

Specification

dimmable	NO
Energylabel from 2013	A+
Suitable for indoors	Yes
Application	general
Base	R7s
Lamp shape	R7s

Colour Temperature consistency (SDCM according to Mac Adam's ellipse)

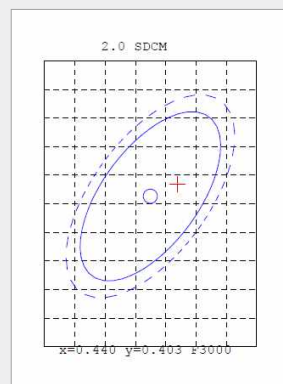

Peak of light intensity (max. cd)

