

R39LED



Logistic Data

| | |
|-----------------------------|---------------|
| Code | 21232 |
| Product | R39LED |
| Box quantity (pcs.) | 10/100 |
| EAN Box | 8012878212326 |
| Gross weight of box in kg | 4.30 |
| Weight of single lamp in kg | 0.043 |
| Length of box in m | 0.525 |
| Width of box in m | 0.25 |
| Height of box in m | 0.215 |
| ETIM class name | LED lamp |
| Beam angle | 120° |
| Brand of LED | EPISTAR |
| Power Factor | >0.4 |

Electrical Parameters

| | |
|------------------------------|-------|
| Lamp nominal wattage | 3W |
| Rated wattage | 3.0 W |
| Nominal current (mA) | 29 mA |
| Energy Consumption kWh/1000h | 3 |


Light Application Parameters

| | |
|---------------------------------|--------------|
| Luminous flux | 250 lm |
| Luminous efficiency of lamp | 83.33lm/W |
| Colour temperature | 3000 K |
| Colour rendering index Ra | ≥80 |
| LLMF at the end of nominal life | 0.60(35000h) |
| SDCM | 0.5 |
| Imax(cd) | 81.01 |
| Switching cycles | 20000 |

Specification

| | |
|-----------------------|---------|
| dimmable | NO |
| Energylabel from 2013 | A+ |
| Suitable for indoors | Yes |
| Application | general |
| Base | E14 |
| Lamp shape | R39 |

Colour Temperature consistency (SDCM according to Mac Adam's ellipse)

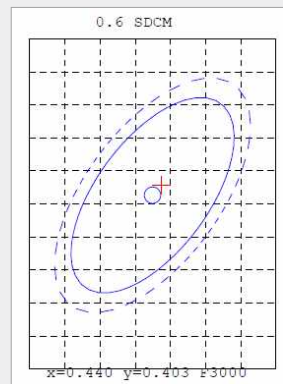

Peak of light intensity (max. cd)

