

DICROICALED STD



Logistic Data

Code	21269
Product	DICROICALED STD
Box quantity (pcs.)	1/200
EAN Box	8012878212692
Gross weight of box in kg	3.05
Weight of single lamp in kg	0.015
Length of box in m	0.325
Width of box in m	0.3
Height of box in m	0.155
ETIM class name	LED lamp
Beam angle	140°
Brand of LED	EPISTAR
Power Factor	>0.5

Electrical Parameters

Lamp nominal wattage	1.4W
Rated wattage	1.5W
Nominal current (mA)	18 mA
Energy Consumption kWh/ 1000h	2


Light Application Parameters

Luminous flux	110 lm
Luminous efficiency of lamp	73.33 lm/W
Colour temperature	3000 K
Colour rendering index Ra	≥80
LLMF at the end of nominal life	0.60(350000h)
SDCM	1.6
Imax(cd)	126
Switching cycles	15000


Specification

dimmable	NO
Energylabel from 2013	A+
Suitable for indoors	Yes
Application	general
Base	E14
Lamp shape	T26

Colour Temperature consistency (SDCM according to Mac Adam's ellipse)

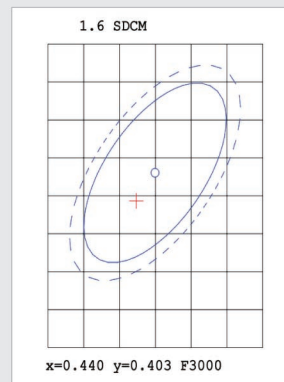

Peak of light intensity (max. cd)

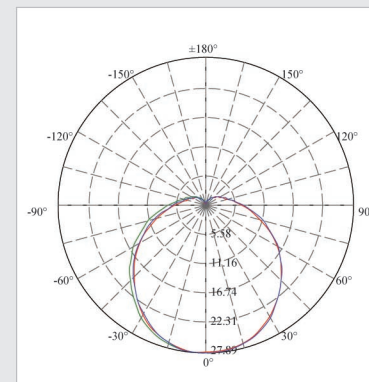

Spectral distribution of the lamp (range 180-800nm)

