

SFERALED ECO



Logistic Data

Code	21276
Product	SFERALED ECO
Box quantity (pcs.)	10/100
EAN Box	8012878212760
Gross weight of box in kg	6.07
Weight of single lamp in kg	0.06
Length of box in m	0.525
Width of box in m	0.256
Height of box in m	0.226
ETIM class name	LED lamp
Beam angle	270°
Brand of LED	EPISTAR
Power Factor	>0.4

Electrical Parameters

Lamp nominal wattage	5 W
Rated wattage	5.0 W
Nominal current (mA)	42 mA
Energy Consumption kWh/1000h	5


Light Application Parameters

Luminous flux	420 lm
Luminous efficiency of lamp	84 lm/W
Colour temperature	3000 K
Colour rendering index Ra	≥80
LLMF at the end of nominal life	0.55(20000h)
SDCM	1.8
Imax(cd)	75
Switching cycles	20000

Specification

dimmable	NO
Energylabel from 2013	A+
Suitable for indoors	Yes
Application	general
Base	E14
Lamp shape	G45

Colour Temperature consistency (SDCM according to Mac Adam's ellipse)

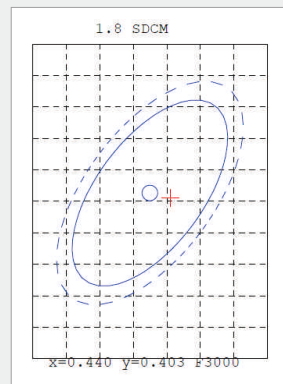

Peak of light intensity (max. cd)

