

LINEARELED EVO I 4



Logistic Data

Code	21432
Product	LINEARELED EVO I 4
Box quantity (pcs.)	20/200
EAN Box	8012878214320
Gross weight of box in kg	12.5
Weight of single lamp in kg	0.045
Length of box in m	0.525
Width of box in m	0.303
Height of box in m	0.48
ETIM class name	LED lamp
Beam angle	180°
Brand of LED	EPISTAR
Power Factor	>0.5
Voltage	220-240

Light Application Parameters

Luminous flux	1800 lm
Luminous efficiency of lamp	128.57 lm/W
Colour temperature	3000 K
Colour rendering index Ra	≥80
LLMF at the end of nominal life	0.88 (15000h)
SDCM	2.0
Imax(cd)	339
Switching cycles	20000


Specification

dimnable	NO
Energylabel from 2013	A+
Suitable for indoors	Yes
Application	general
Base	R7s
Lamp shape	R7s

Electrical Parameters

Lamp nominal wattage	14 W
Rated wattage	14.0 W
Nominal current (mA)	61 mA
Energy Consumption kWh/1000h	14

Colour Temperature consistency
(SDCM according to Mac Adam's ellipse)

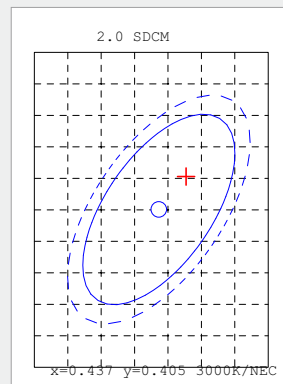

Peak of light intensity (max. cd)

