

# DICROICALED GU4



## Logistic Data

Code	21506
Product	DICROICALED GU4
Box quantity (pcs.)	10/100
EAN Box	8012878215068
Gross weight of box in kg	18
Weight of single lamp in kg	0.36
Length of box in m	0.445
Width of box in m	0.215
Height of box in m	0.175
ETIM class name	LED lamp
Beam angle	380°
Brand of LED	EPISTAR
Power Factor	>0.5
Voltage	12AC/DC

## Electrical Parameters

Lamp nominal wattage	4W
Rated wattage	4.0 W
Nominal current (mA)	580mA
Energy Consumption kWh/1000h	4


## Light Application Parameters

Luminous flux	330 lm
Luminous efficiency of lamp	82.5lm/W
Colour temperature	3000 K
Colour rendering index Ra	≥80
LLMF at the end of nominal life	0.85 (15000h)
SDCM	2.2
Imax(cd)	421.5
Switching cycles	20000

## Specification

dimmable	NO
Energylabel from 2013	A+
Suitable for indoors	Yes
Application	general
Base	GU4
Lamp shape	PAR16

Colour Temperature consistency (SDCM according to Mac Adam's ellipse)

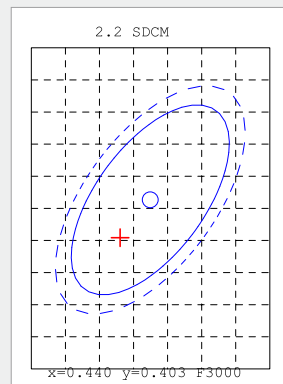

Peak of light intensity (max. cd)

