

ST64



Logistic Data

| | |
|-----------------------------|---------------|
| Code | 21560 |
| Product | ST64 |
| Box quantity (pcs.) | 10/80 |
| EAN Box | 8012878215495 |
| Gross weight of box in kg | 7.6 |
| Weight of single lamp in kg | 0.0575 |
| Length of box in m | 0.61 |
| Width of box in m | 0.375 |
| Height of box in m | 0.335 |
| ETIM classname | LED lamp |
| Beam angle | 360 |
| Brand of LED | ETI/San |
| Power Factor | >0.5 |

Light Application Parameters

| | |
|---------------------------------|------------|
| Luminous flux | 1521lm |
| Luminous efficiency of lamp | 138.27lm/W |
| Colour temperature | 2700K |
| Colour rendering indexRa | >80 |
| LLMF at the end of nominal life | 15000 |
| SDCM | <6 |
| Imax(cd) | 135 |
| Switching cycles | 50000 |
| Life (Hrs) | 20.000 |


Electrical Parameters

| | |
|------------------------------|---------|
| Lamp nominal wattage | 11W |
| Rated wattage | 11W |
| Nominal current (mA) | 82mA |
| Energy Consumption kWh/1000h | 11 |
| Voltage | 220-240 |

Specification

| | |
|-----------------------|---------|
| Dimmable | NO |
| Energylabel from 2013 | A++ |
| Suitable for indoors | YES |
| Application | general |
| Base | E27 |
| Lamp shape | ST64 |

Colour Temperature consistency (SDCM according to Mac Adam's ellipse)

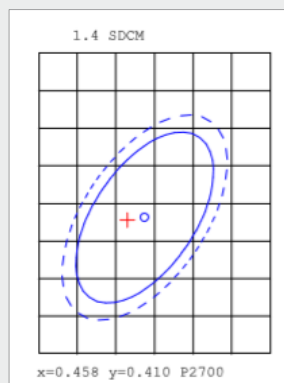

Peak of light intensity (max. cd)

