

ECO-PIATTADECO



Logistic Data

| | |
|-----------------------------|----------------|
| Code | 21584 |
| Product | ECO-PIATTADECO |
| Box quantity (pcs.) | 10/100 |
| EAN Box | 8012878215846 |
| Gross weight of box in kg | 12.5 |
| Weight of single lamp in kg | 0.087 |
| Length of box in m | 0.405 |
| Width of box in m | 0.435 |
| Height of box in m | 0.235 |
| ETIM class name | LED lamp |
| Beam angle | 100° |
| Brand of LED | HONGLI |
| Power Factor | >0.5 |
| Voltage | 220-240 |

Light Application Parameters

| | |
|---------------------------------|---------------|
| Luminous flux | 620 lm |
| Luminous efficiency of lamp | 88.57 lm/W |
| Colour temperature | 4000 K |
| Colour rendering index Ra | ≥80 |
| LLMF at the end of nominal life | 0.85 (15000h) |
| SDCM | 2.7 |
| Imax(cd) | 206 |
| Switching cycles | 20000 |


Electrical Parameters

| | |
|------------------------------|-------|
| Lamp nominal wattage | 7W |
| Rated wattage | 7.0 W |
| Nominal current (mA) | 50mA |
| Energy Consumption kWh/1000h | 7 |

Specification

| | |
|-----------------------|---------|
| dimmable | NO |
| Energylabel from 2013 | A+ |
| Suitable for indoors | Yes |
| Application | general |
| Base | GX53 |
| Lamp shape | GX53 |

Colour Temperature consistency (SDCM according to Mac Adam's ellipse)

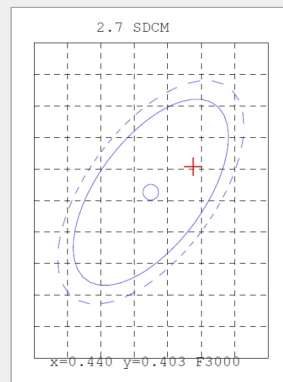

Peak of light intensity (max. cd)

