



## STD MICROICALED TRP

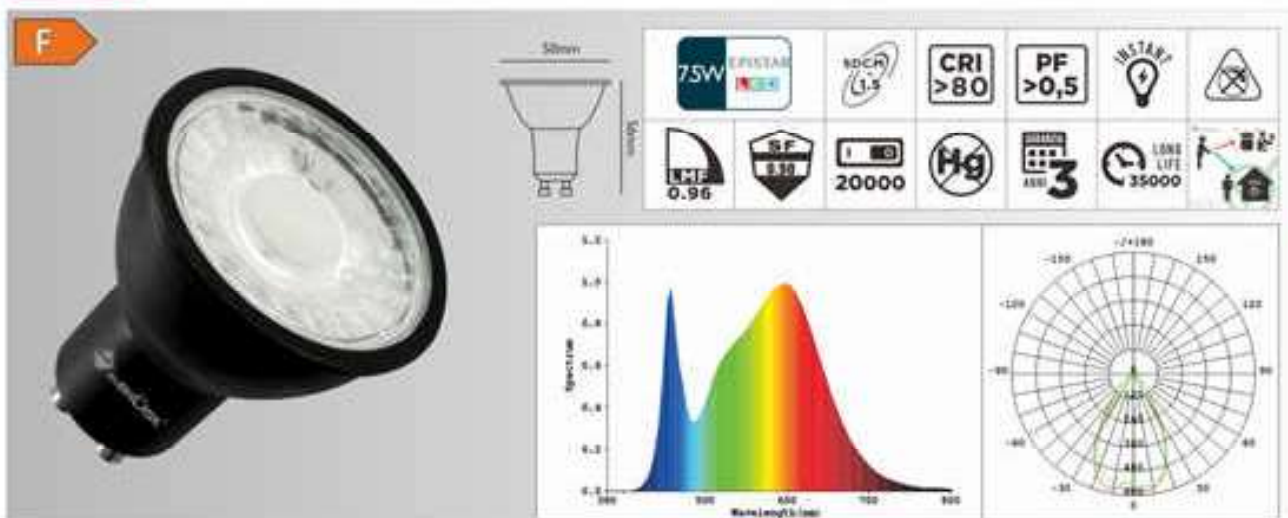

### DICROICALED TRP

codice	W	W	V	attacco	colore	lumen360°	lumen90°	fascio	imballo
code	W	W	V	base	colour	lumen360°	lumen90°	beam	packing
21660	7.5	88(ERP)	220-240	GU10	3000K	650	640	60°	10/100
21661	7.5	91(ERP)	220-240	GU10	4000K	670	660	60°	10/100

## STD MICROICALED TRP DIMMERABILE

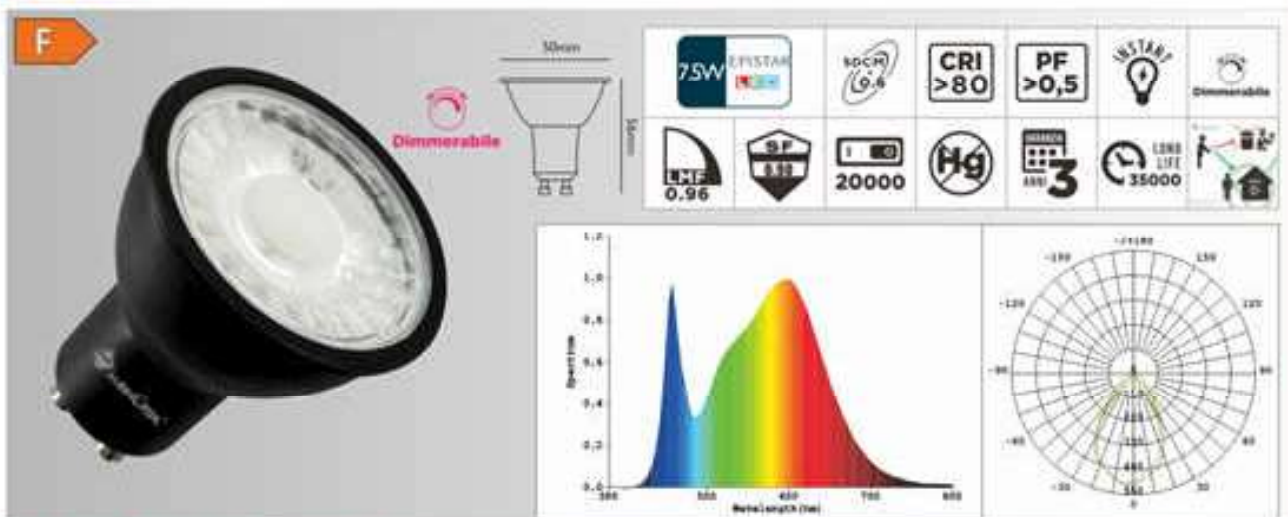

### DICROICALED TRP DIMMERABILE

codice	W	W	V	attacco	colore	lumen360°	lumen90°	fascio	imballo
code	W	W	V	base	colour	lumen360°	lumen90°	beam	packing
21662	7.5	84(ERP)	220-240	GU10	3000K	620	610	60°	10/100

- Dimmerabile con la maggior parte dei dimmers in commercio. Dimmerabilità garantita con i dimmers per lampade LED. Vedi pagina 166.

*Dimmable with most of the dimmers available on the market. Dimmability guaranteed with dimmers for LED bulbs. See page 166.*