



PRO PAR38LED IP65

F

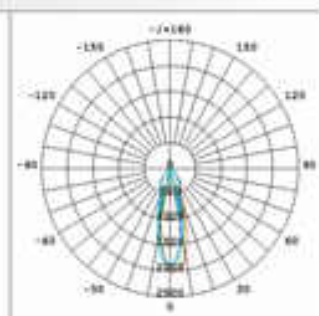

15W EPISTAR	SDCR 4.3	CRI >80	PF >0,5	INSTANT	
LMF 0.96	SF 8.8	20000	Hg	4	LONG LIFE 40000

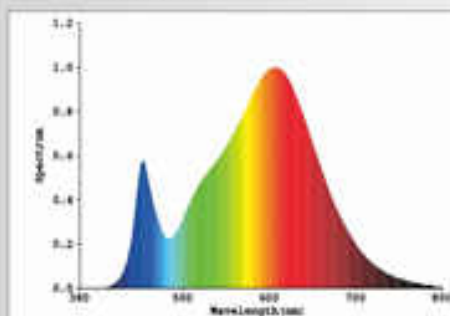

PAR38LED IP65

codice	W	W	V	attacco	colore	lumen360°	lumen90°	fascio	imballo
code	W	W	V	base	colour	lumen360°	lumen90°	beam	packing
21676	15	146(ERP)	220-240	E27	3000°K	1300	1250	40°	5/30

PAR38LED IP65

codice	W	W	V	attacco	colore	lumen360°	lumen120°	fascio	imballo
code	W	W	V	base	colour	lumen360°	lumen120°	beam	packing
21677	15	145(ERP)	220-240	E27	3000°K	1300	1240	115°	5/30





PRO PAR38LED IP65 DIMMERABILE

F



Dimmerabile

15W EPISTAR	SDCR 4.3	CRI >80	PF >0,5	INSTANT	Dimmerabile
LMF 0.96	SF 8.8	20000	Hg	4	LONG LIFE 40000

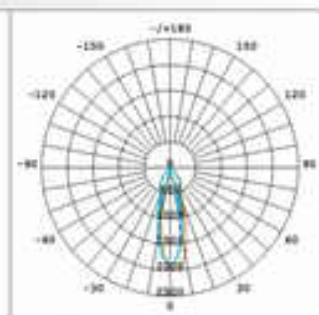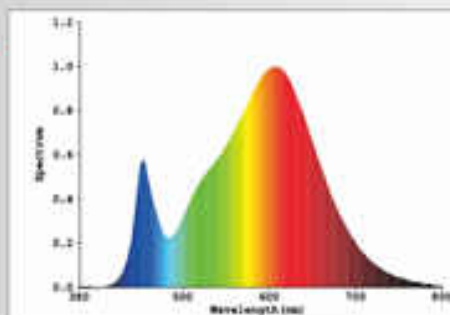

PAR38LED IP65

codice	W	W	V	attacco	colore	lumen360°	lumen90°	fascio	imballo
code	W	W	V	base	colour	lumen360°	lumen90°	beam	packing
21680	15	140(ERP)	220-240	E27	3000°K	1250	1200	40°	5/30



- Dimmerabile con la maggior parte dei dimmers in commercio. Dimmerabilità garantita con i dimmers per lampade LED. Vedi pagina 166.

Dimmable with most of the dimmers available on the market. Dimmability guaranteed with dimmers for LED bulbs. See page 166.

