

**PRO+** DICRO\_PRECISE DIMMERABILE


G



Dimmerabile


**DICRO\_PRECISE DIMMERABILE**

codice	W	W	V	attacco	colore	lumen360°/cd	lumen90°	fascio	imballo
code	W	W	V	base	colour	lumen360°/cd	lumen90°	beam	packing
21688	6.8	61 (ERP)	220-240	GU10	2700°K	480/2800	430	15°	10/100
21689	6.8	61 (ERP)	220-240	GU10	2700°K	480/1000	430	38°	10/100
21690	6.8	61 (ERP)	220-240	GU10	2700°K	480/530	430	60°	10/100

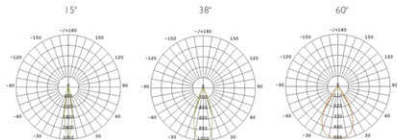

- Elevata qualità della luce e relativo comfort ambientale
- Eccellente compatibilità con i dimmers in commercio (Pag.8)
- Range dimmerazione >80%
- L70850\_40000 ore
- Ottimo parametro deviazione temperatura colore (SDCM:3)
- Alto indice di resa cromatica (CRI 97)
- Alto Indice rosso saturo (R9:80)
- Ridottissimo effetto strobo (SVM:0.26)
- Privo di flicker visibile (AC ripple frequency <10%)
- Preciso controllo del fascio luminoso
- Garanzia 5 Anni

- High quality of light and relative ambient comfort
- Excellent dimming compatibility (Page 8)
- Dimming range >80%
- L70850\_40000 hrs
- Good Standard Deviation Colour Matching (SDCM:3)
- High Colour Rendering Index (CRI 97)
- High saturated red colour index (R9:80)
- Very low strobo effect (SVM:0.26)
- Flicker free (AC ripple frequency <10%)
- Precise beam angle
- 5 YEARS Warranty

**PRO+** DICRO\_PRECISE DIMMERABILE


G



Dimmerabile


**DICRO\_PRECISE DIMMERABILE**

codice	W	W	V	attacco	colore	lumen360°/cd	lumen90°	fascio	imballo
code	W	W	V	base	colour	lumen360°/cd	lumen90°	beam	packing
21691	6.8	63 (ERP)	220-240	GU10	3000°K	500/2900	450	15°	10/100
21692	6.8	63 (ERP)	220-240	GU10	3000°K	500/1100	450	38°	10/100
21693	6.8	63 (ERP)	220-240	GU10	3000°K	500/550	450	60°	10/100

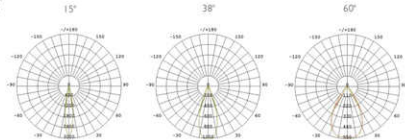

- Elevata qualità della luce e relativo comfort ambientale
- Eccellente compatibilità con i dimmers in commercio (Pag.8)
- Range dimmerazione >80%
- L70850\_40000 ore
- Ottimo parametro deviazione temperatura colore (SDCM:3)
- Alto indice di resa cromatica (CRI 97)
- Alto Indice rosso saturo (R9:80)
- Ridottissimo effetto strobo (SVM:0.26)
- Privo di flicker visibile (AC ripple frequency <10%)
- Preciso controllo del fascio luminoso
- Garanzia 5 Anni

- High quality of light and relative ambient comfort
- Excellent dimming compatibility (Page 8)
- Dimming range >80%
- L70850\_40000 hrs
- Good Standard Deviation Colour Matching (SDCM:3)
- High Colour Rendering Index (CRI 97)
- High saturated red colour index (R9:80)
- Very low strobo effect (SVM:0.26)
- Flicker free (AC ripple frequency <10%)
- Precise beam angle
- 5 YEARS Warranty