




PRO CRI>90 DICROLED I0\_HIGH INTENSITY

A+







DICROLED I0

codice	W	W	V	attacco	colore	lumen360°/cd	lumen90°	fascio	imballo
code	W	W	V	base	colour	lumen360°/cd	lumen90°	beam	packing
21518	6.5	45(ERP)	220-240	GU10	3000°K	360/4106	350	10°	10/100

PRO DICROLED I0\_HIGH INTENSITY

A+


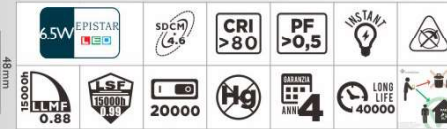



DICROLED I0

codice	W	W	V	attacco	colore	lumen360°/cd	lumen90°	fascio	imballo
code	W	W	V	base	colour	lumen360°/cd	lumen90°	beam	packing
21600	6.5	41(ERP)	12 AC/DC	GU5,3	2700°K	400/5127	390	10°	10/100
21601	6.5	41(ERP)	12 AC/DC	GU5,3	3000°K	400/5127	390	10°	10/100
21602	6.5	41(ERP)	12 AC/DC	GU5,3	4000°K	410/5127	400	10°	10/100

PRO DICROLED I0\_HIGH INTENSITY

A+



DICROLED I0

codice	W	W	V	attacco	colore	lumen360°/cd	lumen90°	fascio	imballo
code	W	W	V	base	colour	lumen360°/cd	lumen90°	beam	packing
21425	6.5	55(ERP)	220-240	GU10	3000°K	400/5127	390	10°	10/100
21426	6.5	57(ERP)	220-240	GU10	4000°K	410/5127	400	10°	10/100

