


ECO GOCCIALED ECO ALTA_EFFICIENZA/HIGH EFFICIENCY



A+

15W EPISTAR
SDCM ≤ 6
CRI >80
PF >0,5
INSTANT
15000H
LMF 0.83
LSP 15000H
20000
Hg
2 ANNI
LONG LIFE 20000

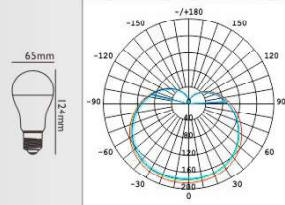


GOCCIALED ECO

codice	W	W	V	attacco	colore	lumen	fascio	imballo
code	W	W	V	base	colour	lumen	beam	packing
21489	15	106(ERP)	220-240	E27	3000°K	1650	240°	10/50
21490	15	109(ERP)	220-240	E27	4000°K	1700	240°	10/50
21491	15	112(ERP)	220-240	E27	6000°K	1750	240°	10/50

ECO GOCCIALED ECO

A+

8W EPISTAR
SDCM ≤ 6
CRI >80
PF >0,5
INSTANT
15000H
LMF 0.83
LSP 15000H
20000
Hg
2 ANNI
LONG LIFE 20000

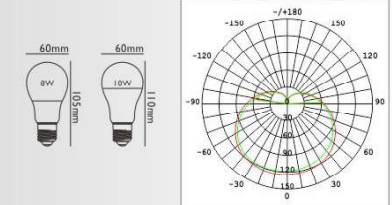

GOCCIALED ECO


codice	W	W	V	attacco	colore	lumen	fascio	imballo
code	W	W	V	base	colour	lumen	beam	packing
21270	8	65(ERP)	220-240	E27	3000°K	900	240°	10/50
21271	8	66(ERP)	220-240	E27	4000°K	910	240°	10/50
21272	8	66(ERP)	220-240	E27	6000°K	920	240°	10/50
21273	10	73(ERP)	220-240	E27	3000°K	1030	240°	10/50
21274	10	74(ERP)	220-240	E27	4000°K	1050	240°	10/50
21275	10	76(ERP)	220-240	E27	6000°K	1080	240°	10/50

ECO GOCCIALED ECO ALTA_EFFICIENZA/HIGH EFFICIENCY



A+

13W EPISTAR
SDCM ≤ 6
CRI >80
PF >0,5
INSTANT
15000H
LMF 0.83
LSP 15000H
20000
Hg
2 ANNI
LONG LIFE 20000

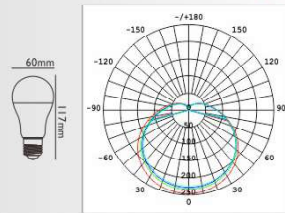


GOCCIALED ECO

codice	W	W	V	attacco	colore	lumen	fascio	imballo
code	W	W	V	base	colour	lumen	beam	packing
21486	13	88(ERP)	220-240	E27	3000°K	1300	240°	10/50
21487	13	90(ERP)	220-240	E27	4000°K	1350	240°	10/50
21488	13	93(ERP)	220-240	E27	6000°K	1400	240°	10/50

ECO SFERALED ECO

A+

5W EPISTAR
SDCM ≤ 6
CRI >80
PF >0,4
INSTANT
15000H
LMF 0.83
LSP 15000H
20000
Hg
2 ANNI
LONG LIFE 20000

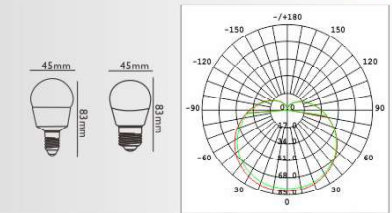

SFERALED ECO

codice	W	W	V	attacco	colore	lumen	fascio	imballo
code	W	W	V	base	colour	lumen	beam	packing
21276	5	37(ERP)	220-240	E14	3000°K	430	240°	10/100
21277	5	37(ERP)	220-240	E14	4000°K	440	240°	10/100
21278	5	38(ERP)	220-240	E14	6000°K	450	240°	10/100
21279	5	37(ERP)	220-240	F77	3000°K	430	240°	10/100
21280	5	37(ERP)	220-240	E27	4000°K	440	240°	10/100
21281	5	38(ERP)	220-240	E27	6000°K	450	240°	10/100

