


GOCCIALED A70 FILOLED



Code	21736
Lighting technology used:	LED
Non-directional or directional (NDLS / DLS):	NDLS
Light source cap-type (or other electric interface):	
Mains or non-mains (MLS / NMLS):	MLS
Dimmable:	no
On-mode power (P _{on}), expressed in W	18 (W)
Energy consumption (kWh/1000 h)	18 (kWh/1000h)
Energy efficiency class	D
Useful luminous flux (Φ _{use})	2452 in sphere (360°)
Correlated colour temperature K	2700

Height		126 (mm)
Width		70 (mm)
Depth		70 (mm)
Claim of equivalent powerc		yes / -
If yes, equivalent power (W)		150 (W)
Chromaticity coordinates (x and y)		
	X	0,458
	Y	0,4101
Peak luminous intensity (cd)		0 (cd)
Beam angle in degrees, or the range of beam angles that can be set		0 (°)
R9 colour rendering index value		0
Survival factor		0,9
Lumen maintenance factor		0,9311
displacement factor (cos φ1)		0,7
Colour consistency in McAdam ellipses		6
Flicker metric (Pst LM)		1
Stroboscopic effect metric (SVM)		0,4

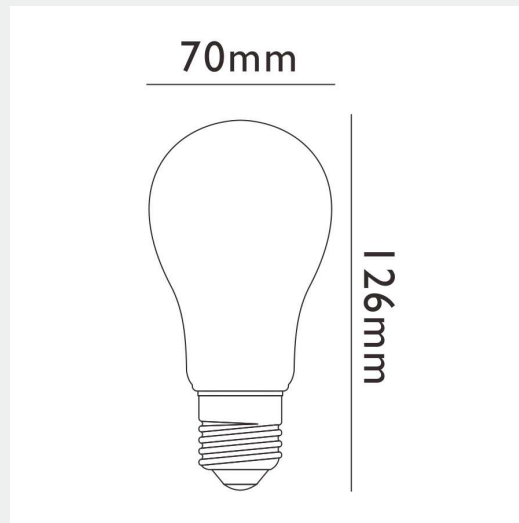

MARINO CRISTAL SPA

Via Guardia del Consiglio, 29/31

47899 - Serravalle

REPUBBLICA DI SAN MARINO

TEL +378 0549 901188

FAX +378 0549 900612

www.marinocristal.com

marinocristal@marinocristal.com