


## PRO PLCI 5LED

A+

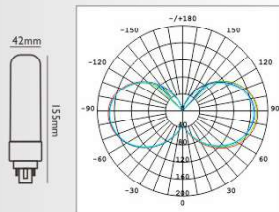

### PLCI 5LED


codice	W	W	V	attacco	colore	lumen	fascio	imballo
code	W	W	V	base	colour	lumen	beam	packing
21226	15	98(ERP)	220-240	G24	4000°K	1500	330°	10/50

- By-passare l'alimentatore. Collegamento diretto 220-240V  
Ballast Bypass Required

## PRO GOCCIALED EVO COMPACT ALTA\_EFFICIENZA/HIGH EFFICIENCY



A+

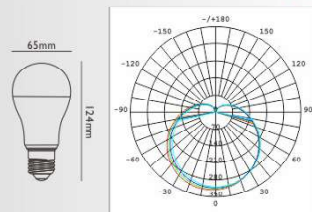



### GOCCIALED EVO COMPACT

codice	W	W	V	attacco	colore	lumen	fascio	imballo
code	W	W	V	base	colour	lumen	beam	packing
21329	16	123(ERP)	220-240	E27	2700°K	1950	240°	10/50
21330	16	125(ERP)	220-240	E27	4000°K	2000	240°	10/50

## PRO GOCCIALED EVO COMPACT DIMMERABILE ALTA\_EFFICIENZA/HIGH EFFICIENCY



A+

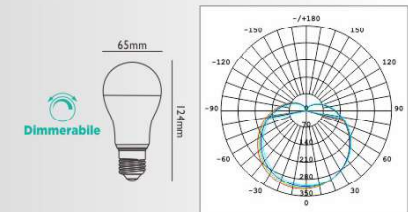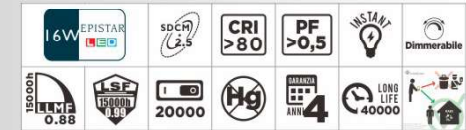

### GOCCIALED EVO COMPACT DIMMERABILE


codice	W	W	V	attacco	colore	lumen	fascio	imballo
code	W	W	V	base	colour	lumen	beam	packing
21332	16	117(ERP)	220-240	E27	2700°K	1850	240°	10/50

- Dimmerabile con la maggior parte dei dimmers in commercio.  
Dimmerabilità garantita con i dimmers per lampade LED.

*Dimmable with most of the dimmers available on the market.  
Dimmability guaranteed with dimmers for LED bulbs.*

## PRO GOCCIALED DECO DIMMERABILE

A+

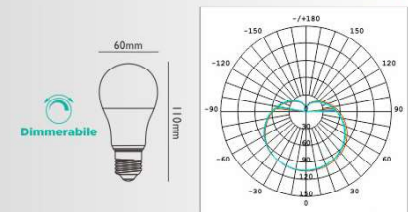

### GOCCIALED DECO DIMMERABILE

codice	W	W	V	attacco	colore	lumen	fascio	imballo
code	W	W	V	base	colour	lumen	beam	packing
21098	9	65(ERP)	220-240	E27	2700°K	900	270°	10/50

- Dimmerabile con la maggior parte dei dimmers in commercio.  
Dimmerabilità garantita con i dimmers per lampade LED.

*Dimmable with most of the dimmers available on the market.  
Dimmability guaranteed with dimmers for LED bulbs.*