


PRO LINEARELED EVO 14

A+



14W EPISTAR	SDCM 3.0	CRI >80	PF >0,5	INSTANT	
15000H LMFP 0.88	LSP 15000H A99	20000	Hg	BARBARA ANN 4	LONG LIFE 40000

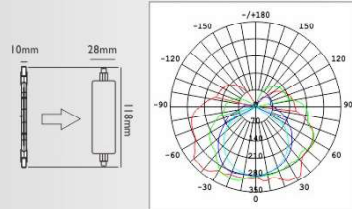

LINEARELED EVO 14


codice	W	W	V	attacco	colore	lumen	fascio	imballo
code	W	W	V	base	colour	lumen	beam	packing
21432	14	114(ERP)	220-240	R7s	3000°K	1800	180°	20/200
21433	14	117(ERP)	220-240	R7s	4000°K	1850	180°	20/200

PRO LINEARELED EVO 360

A+



6W EPISTAR	SDCM 3.0	CRI >80	PF >0,5	INSTANT	
15000H LMFP 0.88	LSP 15000H A99	20000	Hg	BARBARA ANN 4	LONG LIFE 40000

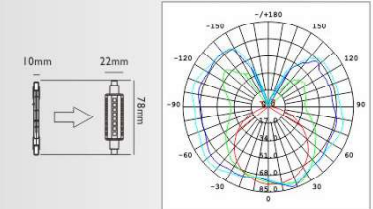

LINEARELED EVO 360 78MM


codice	W	W	V	attacco	colore	lumen	fascio	imballo
code	W	W	V	base	colour	lumen	beam	packing
21208	6	53(ERP)	220-240	R7s	3000°K	700	360°	20/200
21209	6	56(ERP)	220-240	R7s	4000°K	750	360°	20/200

PRO LINEARELED EVO 14 DIMMERABILE

A+



14W EPISTAR	SDCM 3.0	CRI >80	PF >0,5	INSTANT	Dimmerabile
15000H LMFP 0.88	LSP 15000H A99	20000	Hg	BARBARA ANN 4	LONG LIFE 40000

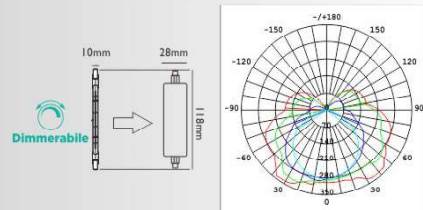

LINEARELED EVO 14 DIMMERABILE

codice	W	W	V	attacco	colore	lumen	fascio	imballo
code	W	W	V	base	colour	lumen	beam	packing
21434	14	109(ERP)	220-240	R7s	3000°K	1700	180°	20/200
21435	14	114(ERP)	220-240	R7s	4000°K	1800	180°	20/200