




CASSETTA STAGNA –IP65 - COSTAMPAGGIO
IP65 ADAPTABLE INJECTED GLANDS



Dettaglio coperchio imperdibile
Unlosable cover detail

CARATTERISTICHE TECNICHE / Technical features	
Dimensioni interne Internal dimensions	80x80x40
Passacavi costampati cable sleeves	6+2
Grado di protezione Protection Degree	IP65
Grado IK IK Degree	IK06
Materiale Material	Tecnopolimero + Tecnoelastomero (Halogen free) Plastic Polymers + tech elastomers (Halogen free)
Resistenza al calore Heat Resistance	Termopressione con biglia 70°C Heat pressure with ball at 70°C
Resistenza al fuoco Resistence to fire	Glow wire 750°C
Temperatura di installazione Installation Temperature	Max= +60°C / min.= -25°C
Normativa di riferimento Reference legislation	EN 60670-1:2005 EN 60670-22:2006
DOCUMENTAZIONE ALLEGATA	
Tabella dimensionale / Dimensional Drawing	003_CS_TD

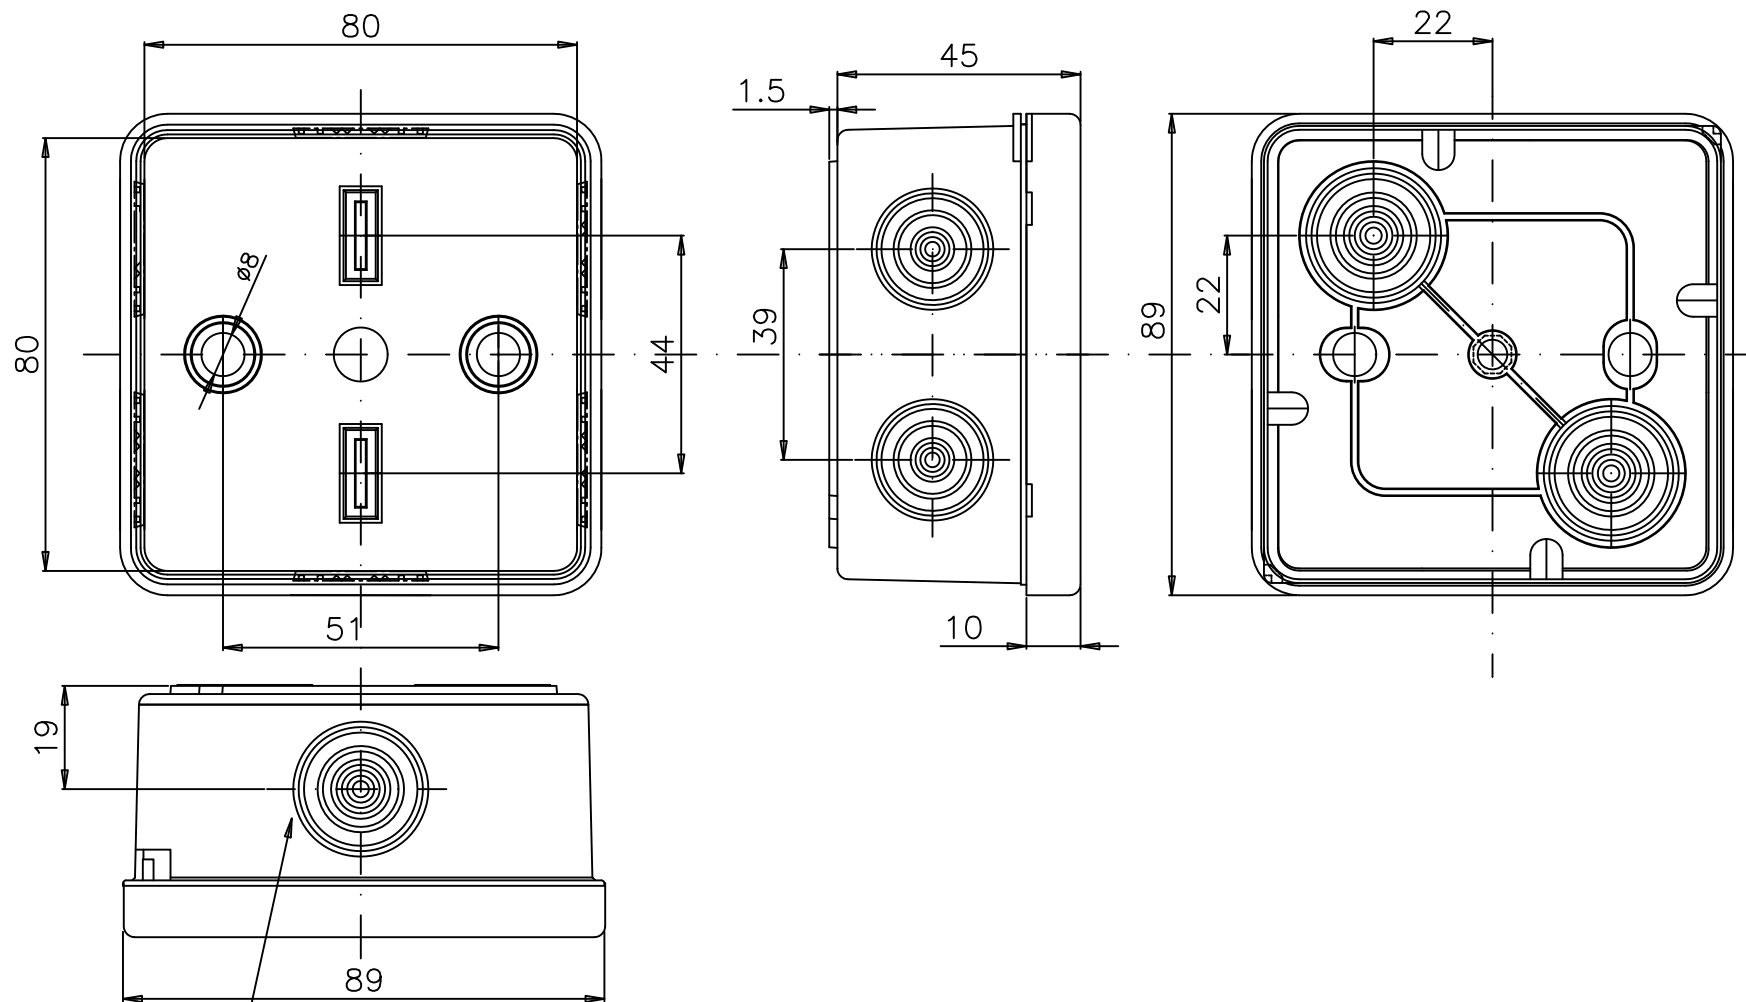

n°. 6+2 INJECTED CABLE GLANDS
MAX $\varnothing 23$

BOITE ETANCHE IP65 – PASSECABLE INJECTES
IP65 ADAPTABLE BOX – INJECTED GLANDS
Cassetta Stagna IP65 Passacavi Iniettati

003.CS

 **Marlanvil**

Tel: 02-83.45.19.11 Fax: 02-83.45.19.99
- San Ferdinando di Puglia (BT)

28/09/2015

- Milano via Sasseti, 17 E-mail: info@marlanvil.it