




CASSETTA STAGNA IP66 PARETI LISCE – GRIGIO – CON VITI IN NYLON
IP66 ADAPTABLE BOX 190x140x72 – SMOOTH WALLS – COVER WITH NYLON SCREW



Dettaglio accessorio staffa di fissaggio: art. 1.940.ST
Detail accessory. Fixing bracket: art. 1.940.ST



Dettaglio apertura coperchio a cerniera
Detail opening hinged lid



Set di fissaggio per cassette 009.A.PL: art. 1.009.A
Fixing kit for 009.A: art. 1.009.A

Un sistema esclusivo che permette di fissare la cassetta alla parete senza forare il fondo, mantenendo il grado di protezione invariato e il doppio isolamento in caso di fissaggio su supporti metallici.




An exclusive system of wedge that allows to fix the to the wall without perforating the bottom, maintaining the degree of protection unchanged and the double isolation in case of fixing on metallic supports.

CARATTERISTICHE TECNICHE / Technical features

Dimensioni interne / internal dimensions	190x140x72
Gradi di protezione / protection degree	IP66
Grado IK / IK degree	IK07
Resistenza al calore / Heat resistance	Glow wire 650°C
Colore / color	Grigio / Grey RAL7035
Temperatura di installazione / installation temperature	Max= +60°C – min.= -25°C
Normativa di riferimento / standard	EN 60670-1:2005 EN 60670-22:2006

DOCUMENTAZIONE / Documentation

Tabella dimensionale / Dimensional drawing	009_A_PL_TD
--	-------------

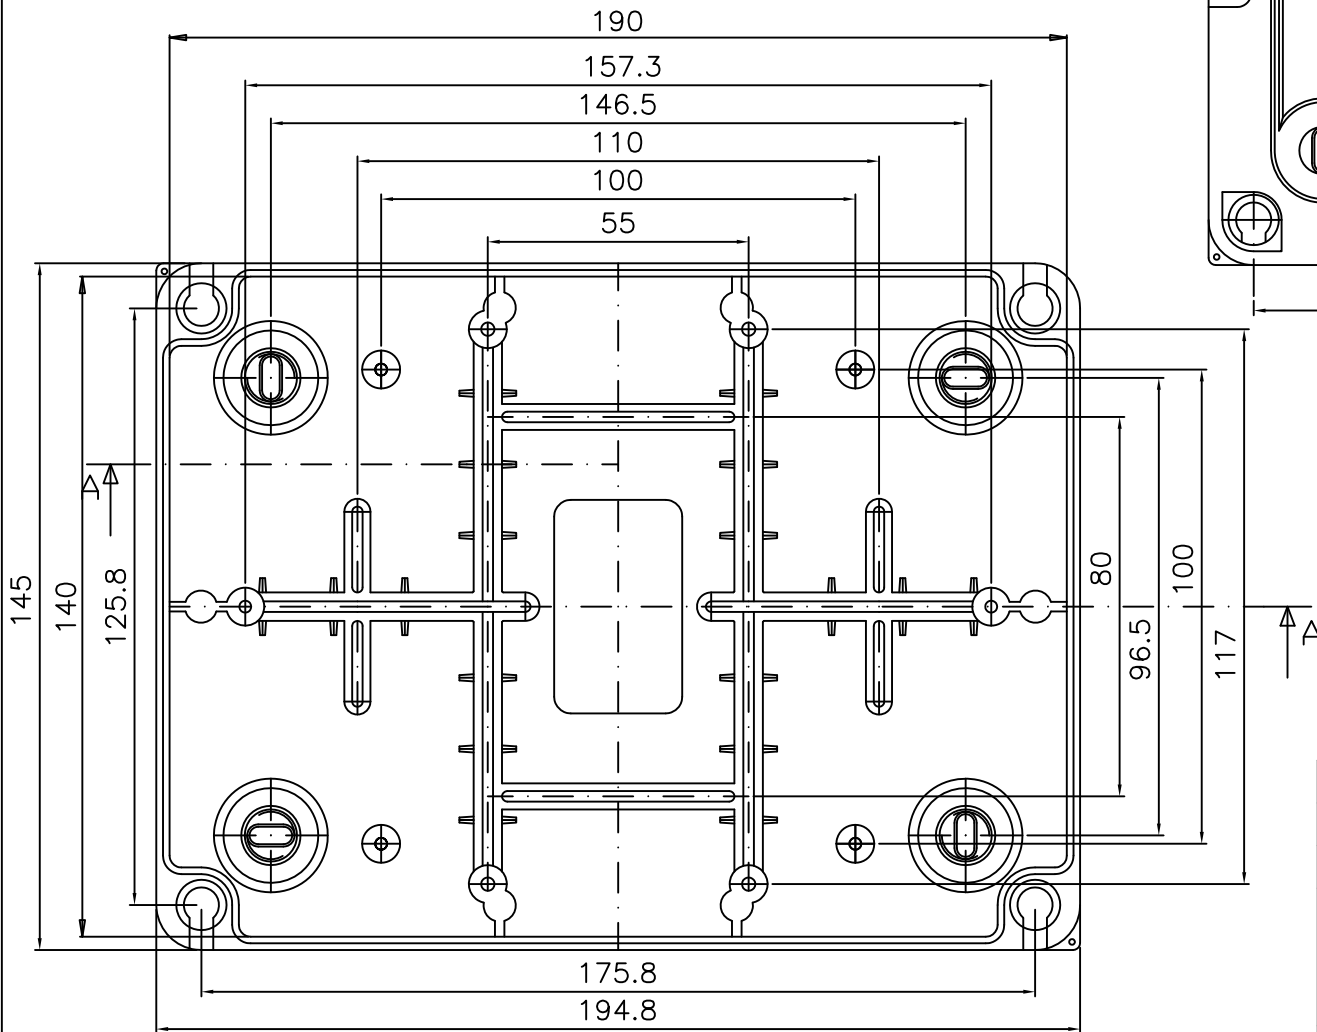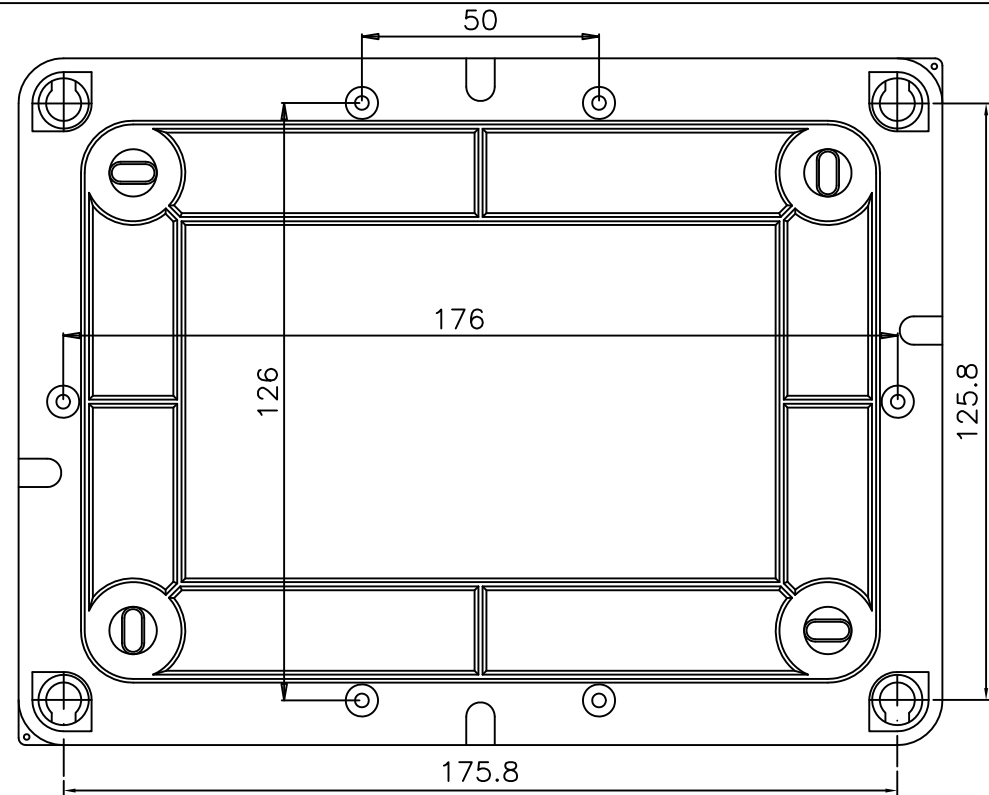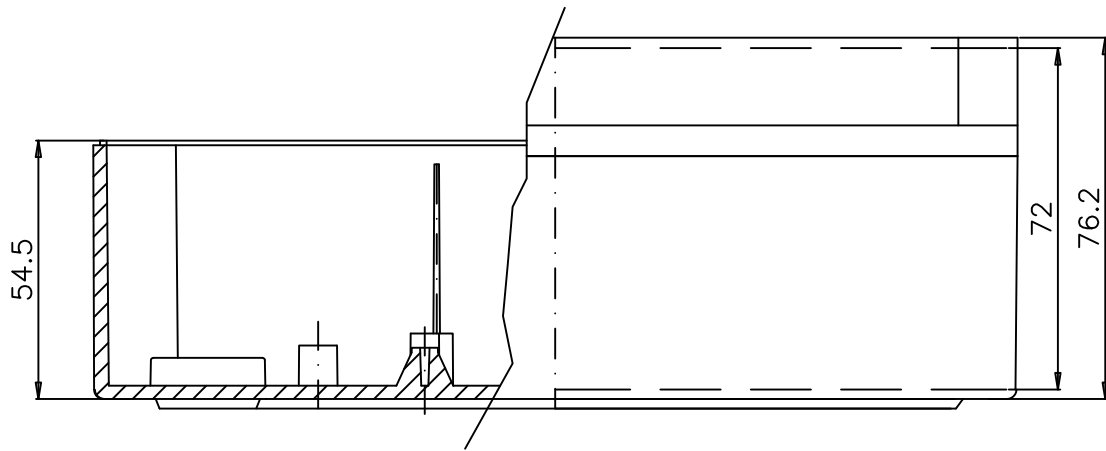

BOITE ETANCHE IP65 - PAROIS LISSES
 IP65 ADAPTABLE BOS - SMOOTH WALLS
 Cassetta Stagna IP65 Viti Nylon - pareti Lisce

009.A.PL	009.A.PK
009.A.PL.HT	009.A.PK.HT
009.A.PL.VO	009.A.PK.VO

 **Marlanvil**
 Tel: 02-83.45.19.11 Fax: 02-83.45.19.99
 -San Ferdinando di Puglia (BT)
 -Milano via Sasseti, 17 E-mail: info@marlanvil.it